

DigitAll *affinity*

When viewing a monitor, it makes sense that you need a large screen size and a narrow bezel.



Friendly & Truly,
the Best Display



SyncMaster 153v/173v

The SyncMaster 153V/173V is the ideal display device for all business and professional applications. Its new slim and simple design refined with Samsung's digital technology allows the product to complement all working environment.

SAMSUNG



Digital affinity

SyncMaster 153v/173v



NUTEK

Advanced Image Quality

You'll be pleasantly surprised to discover vivid and crisp images you never thought possible. All SyncMaster offer high brightness without sacrificing on clarity and they project high contrast for a sharp display image through a wide range of brightness levels.

Environment-Friendly Monitor

The SyncMaster 153V/173V was awarded TCO'03 Certification. And it's a power saving monitor. As SyncMaster 153V/173V operates upon a low 45W power supply, a Digital Power Management System (DPMS) is applied to utilize minimal power (under 2W) when the unit is in standby mode.


Hidden Cable Design

A cable-concealed design enables you to have a clutter free workspace. There are no more clumsy cables to get in your way.

Built-in Power

The SyncMaster's Built-in Power lets you use your desktop space for performance. You won't be bothered by power adaptor on your desk anymore.

Dimensions 153V (173V) / unit:mm

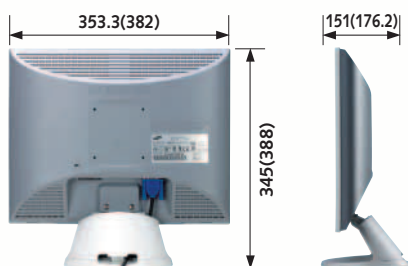

Specifications Summary

Class		SyncMaster 153V	SyncMaster 173V
Panel	Type	a-si TFT/TN	a-si TFT/TN
	Viewable Area	15"	17"
	Pixel Pitch	0.297mm	0.264mm
	Brightness (Typ.)	250cd/m ²	250cd/m ²
	Contrast Ratio	300 : 1	350 : 1
	Viewing Angle (H/V)	140° / 120°	140° / 120°
	Response Time	25ms	25ms
Frequency	Interface	Analog	Analog
	Horizontal Frequency	30-61kHz	30-81kHz
	Vertical Frequency	56-75Hz	56-75Hz
	Bandwidth	80MHz	135MHz
Maximum Resolution		1024 x 768	1280 x 1024
Color Supported		16.2 Mil.	16.2 Mil.
Signal Input	Input Video Signal	Analog RGB	
	Video Level	Analog : 0.7V p-p	
	Sync. Type	Separate H/V	
		Composite H/V	
Plug & Play	Input Connectors	15pin D-sub	
	Included Signal Cables	VGA Cable	
	USB Powered Hub Option	N/A	
Power	DDC	DDC 2B	
	On Mode	32 Watts (Max.)	45 Watts (Max.)
Multimedia Speakers	DPMS Mode	<2.0 Watts	<2.0 Watts
		X	X
OSD-Digital Display Director™		O	O
Wall-Mount		VESA 75mm	VESA 100mm
Available Colors		Black / Silver / Ivory	
Mac Compatibility		O	
Dimensions	Set (W x H x D): with stand	353.3mm x 345mm x 151mm	382mm x 388mm x 176.2mm
	Packing (W x H x D)	428mm x 406mm x 175mm	460mm x 454mm x 200mm
Weight	Net	3.4kg	4.8kg
	Gross	4.6kg	6.2kg
Regulations	Energy	Energy Star, NUTEK	
	Emissions	TCO'03, TCO'99, TCO'95 (BLK)	
Warranty (P / L / Backlight)		3y / 3y / 20,000hrs	
Stand		Simple	

* Design and specifications are subject to change without notice.



<http://www.samsung-monitor.com>

Distributed by: