

**Intermec**

Product Profile

- Field-proven industrial strength
- Rugged metal frame and enclosure
- Throughput up to 10 times faster than the 3400
- Versatile connectivity includes choice of Serial, Parallel, Twinax/Coax, EasyLAN™ Ethernet and EasyLAN™ Wireless
- Supports IEEE 802.1x security
- 200 or 400-dpi printhead option
- Free Intermec Printer Network Manager (IPNM) software
- Free LabelShop® label design and print software



EasyCoder® 3400e PRINTER

The EasyCoder 3400e is a versatile industrial strength printer based on the rugged, field-proven EasyCoder 3400. The 3400e features throughput that is up to 10 times higher than the 3400, making it ideal for today's increasingly complex labels combining 2D bar codes, mixed fonts and graphics. This means no waiting for labels to print!

The 3400e continues to offer the legendary reliability of the 3400 print mechanism. The steel frame enclosure gives the 3400e a rugged platform to withstand harsh industrial environments. The attractive gray metallic enclosure is designed to mask dirt and grime for ease of maintenance.

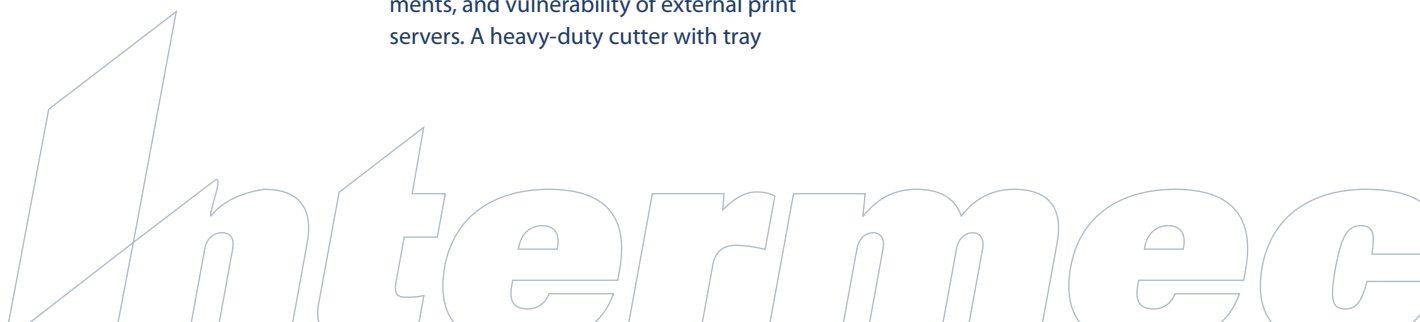
The standard high-speed IEEE 1284 parallel port and enhanced serial port ensure fast host communications. The optional internal EasyLAN Ethernet and EasyLAN Wireless allow for network management without the complexity, space requirements, and vulnerability of external print servers. A heavy-duty cutter with tray

option is available on the 3400D or 3400e printers. And of course, the 3400e is fully backward compatible with 3400A/B/C/D printers.

The EasyLAN Wireless interface uses an integrated 802.11b radio. This radio provides 128-bit WEP, TTLS, LEAP, and WPA encryption of the information relayed through the network. Intermec's wired and wireless technology ensures secure printing and network infrastructure for all environments.

Intermec's Printer Network Manager (IPNM), LabelShop® START design and print software, and InterDriver™ Windows printer driver are included, free of charge, with every printer.

This is a powerful printer that is designed and built for a wide variety of industrial bar code applications.

A large, stylized, light-colored outline of the word "Intermec" spanning the width of the page at the bottom.

Application

Direct Thermal and Thermal Transfer printer for self-adhesive label, ticket and tag applications.

Model

EasyCoder 3400e

Physical Characteristics

Length: 43.8 cm (17.25 in)

Height: 27.7 cm (10.9 in)

Width: 24.9 cm (9.8 in)

Weight: 15.8 kg (35 lbs.)

Print Specifications

Max. Width: 104 mm (4.1 in) 203 dpi; 112 mm (4.4 in) 406 dpi

Max. Length: Unlimited

Element: 0.125 mm (0.00492 in), 203 dpi

Element: 0.062 mm (0.00246 in), 406 dpi

Print Speed

Selectable Print Speed: 51mm (2ips) to 204 mm (8 ips)

Print Resolution

8 dots/mm (203 dpi); 16 dots/mm (406 dpi)

Media Specifications

Style: Roll-feed, die-cut, continuous or fanfold labels, tags, or tickets

Type: Plain paper thermal transfer or thermal sensitive papers

Maximum Liner Width: 114 mm (4.5 in)

Minimum Liner Width: 19 mm (.75 in)

Maximum Media Length: 610 mm

(24 in); fanfold 432 mm (17 in)

Minimum Media Length: 13 mm (0.5 in)

Thickness: .08 mm to .31 mm (.003 to .012 in)

Supply Roll Capacity: 213 mm (8.38 in)

Core Size: 76 mm (3 in)

Ribbon Specifications

Type: Wax, wax/resin, resin

Standard Width: 51 mm (2 in), 77 mm (3.0 in),

104 mm (4.1 in), 114 mm (4.5 in)

Length: 152 m (6,000 in linear)

Interface**Standard:**

- RS-232 Serial
- IEEE 1284 Parallel

Optional:

- Internal IBM Twinax or Coax
- Internal EasyLAN™ Ethernet 100/10BaseT
- EasyLAN Wireless, internal 802.11b Wireless Ethernet

EasyLAN Ethernet Supported Protocols:

TCP/IP-suite (TCP, UDP, ICMP, IGMP, etc.), LPR/LPD, FTP, BOOTP, DHCP, HTTP, SNMP, SMTP. SNMP-MIB II supported (over UDP/IP), private enterprise MIB included

EasyLAN Wireless

- Fully integrated IEEE 802.11b
- WEP 128 bit, TTLS, LEAP, and WPA
- Supports IEEE 802.1x security
- Multiple industrial antenna options for maximized coverage

Software**Available printer command languages:**

- IPL

Applications/Drivers (comes on Printer Companion CD) including:

- InterDriver™ Windows printer driver
- Intermec LabelShop® START label design and print package
- Intermec Printer Network Manager (IPNM) for administration of network connected printers
- PrintSet for printer configuration

Bar Code Symbolologies

1-Dimensional: Code 2 of 5, Codabar, Code 11, Code 39, Code 93, Code 128, HIBC, Interleaved 2 of 5, Postnet, UPC/EAN, JIS-IFT

2-Dimensional: Code One, Code 16K, Code 49, DataMatrix, PDF417, QR Code, Micro PDF, MaxiCode

Standards Supported

UPC/EAN Shipping Container; UCC/EAN 128 Serial Shipping Container; MH10.8 Shipping Label; AIAG (shipping parts label); LOGMARS; POSTNET; ISBT 128; GM1724

Character Sets

- Bitmapped using PrintSet™; All single byte codepage, all double byte codepage
- Code page 850, French, German, ISO 256 character, Italian, Kanji/Katakana (optional), Norwegian/Danish, Spanish, Swedish/Finnish, Swiss, UK, ASCII, USA ASCII

Fonts and Graphics

21 resident bitmapped fonts (includes OCR-A and OCR-B), 3 resident outline fonts, supports user-defined fonts and graphics, supports True Type fonts.

Power Supply

Voltage range: 100, 115, 230 VAC ± 10%

Frequency range: 50 to 60 Hz

Environment

Operating Temperature: 4° to 40° C (40° to 104° F)

Storage Temperature: 0° to 70 ° C (32° to 158° F)

Humidity: 10 to 90% (non condensing)

Ventilation: Free air

Regulatory Approvals

Complies with all FCC Part 15, Class A; CISPR 22 Class A; ICES-003 Class A; UL-US & Canada & TÜV GS agency approved; CE, NOM & C-TIC

Options

Internal EasyLAN™ Ethernet; EasyLAN™ Wireless; Twinax and Coax; Internal Self-strip and rewind; Cutter / Tray; DRAM image expansion 4 MB; Flash storage expansion 16 MB; Kanji/Katakana Fonts

Intermec®
expect MORE®

North America

Corporate Headquarters
6001 36th Avenue West
Everett, Washington 98203
tel: 425.348.2600
fax: 425.355.9551

Systems & Solutions

550 2nd Street S.E.
Cedar Rapids, Iowa 52401
tel: 319.369.3100
fax: 319.369.3453

Media Supplies

9290 Le Saint Drive
Fairfield, Ohio 45014
tel: 513.874.5882
fax: 513.874.8487

Canada

7065 Tranmere Drive
Mississauga, Ontario
L5S 1M2 Canada
tel: 905.673.9333
fax: 905.673.3974

**Europe/
Middle East & Africa**

Headquarters
Sovereign House
Vestern Road
Reading RG1 8BT
United Kingdom
tel: 44.118.987.9400
fax: 44.118.987.9401

Asia

Asia Regional Office
26-16 International Plaza
10 Anson Road
Singapore 079903
tel: 65.6324.8391
fax: 65.6324.8393

Beijing Representative Office

29 FL, Unit A1, China Merchant Tower
118 Jian Guo Road
Chaoyang District, Beijing 100022
Tel: 86 10.5165.5922
Fax: 86 10.6567.6778

Australia

Level 7, 200 Pacific Highway
Crowns Nest, NSW 2065
Australia
tel: 61.2.9492.4400
fax: 61.2.9954.6300

South America & Mexico

Intermec South America Ltda.
Rua Samuel Morse 120 9 andar
Brooklin CEP04576-060
São Paulo, SP
Brazil
tel: 55.11.5502.6770

Intermec Technologies de Mexico

Av Tamaulipas #141, Primer Piso
Col. Hipodromo Condesa
Mexico, DF, 06140 Mexico
tel: 525.55.211.1919
fax: 525.55.211.8121

Internet

www.intermec.com

Sales

800.347.2636
(toll free in N.A.)
tel: 425.348.2726

Service and Support

800.755.5505
(toll free in N.A.)
tel: 425.356.1799

Copyright © 2004 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 611049-01D 12/04

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.