


JumboTag

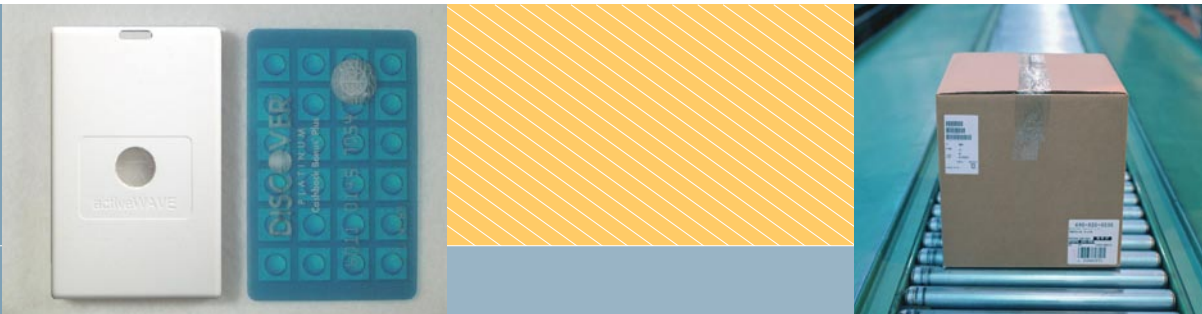

Description

The ActiveWave jumboTag is our largest tag - slightly smaller than a deck of cards. This tag can contain both the LED and buzzer options to conveniently find tagged items easier or alert tag wearers.

By using the optional bracket, this tag can be mounted easily on crates, pallets, and other containers used to hold assets. Almost any merchandise or equipment with a flat surface can be tracked conveniently with a jumboTag. In a warehouse full of aisles and shelves of tagged items, a user searching for a particular item can make a specific tag flash or beep to quickly locate it.

This tag also has a slotted hole near the top for attaching a lanyard, clip, or other mechanism such that it can be worn by people for access control and tracking. If a tagged visitor enters an unauthorized area, the tag can automatically flash or beep as well as send an alert to the guard station.

Typically, the jumboTag remains in sleep mode until it receives a wake up command from an ActiveWave Reader or Field Generator. If the command is intended for this tag (specific address or broadcast), then the tag will awaken and transmit its ID and other information to an assigned system Reader.

The tag can also be configured to automatically wake up at pre-defined intervals, transmit its information to the system, then go back to sleep to conserve battery life.

Unique anti-collision algorithms are used to ensure that all tag data is received, even when multiple tags are transmitting at the same time. To guarantee that all data remains accurate, all tag packets use reliable cyclic redundancy checks.

Several jumboTag versions are available, each using one frequency for transmit and another frequency for receive. This dual-frequency method allows for fast and reliable communications.

JumboTag options include a bracket, LED, buzzer, and various amounts of user memory ranging from 0 to 256Kbits. Even more peripheral options may be added to satisfy your application needs.

Current Practice

Traditional method of Access Control, Asset Tracking, and Inventory Control are limited and outdated. Access Control methods range from security guards to employee badges that must be swiped or placed close to a passive RFID proximity reader. Tracking methods are either entirely visual - dependent on security guards or surveillance cameras - or too costly such as GPS. Inventory Control methods require much money for complex enterprise software, and much more time and manpower for physical counting. Barcode scanning requires line-of-sight, close distance, and clean, undamaged barcode labels. None of these traditional methods offers a solution that is completely hands-free, automated, reliable, and that can save your business thousands.

The ActiveWave Solution

ActiveWave's active RFID solution offers numerous advantages over traditional methods.

Valuable items are easily tracked throughout a facility by simply attaching an ActiveWave tag. Alarms are automatically generated for unauthorized movements through specified doors and at specified times. This same concept applies to tracking people as well. In fact, ActiveWave's Host software ties together both people and assets such that certain assets can only be moved by authorized people.

For inventory counts, ActiveWave tags can automatically wake up and report their presence on a periodic basis. If a tag misses its scheduled "check in" time, then the Host can generate an alarm so the loss can be investigated immediately. New items are added to the count by simply moving them into the warehouse. Imagine the savings of automated, hands-free, daily updates to your entire inventory.

How else can ActiveWave help your business?

With our technology, features, flexibility, and innovation, the sky's the limit...

Visit our web site at www.activewaveinc.com.

User Memory	0 - 256 Kbits	
Multi-Tag Read Capability	Yes	
Transmit Frequency	916 MHz, 927 MHz, or 868 MHz	
Receive Frequency	433 MHz	
Read range (maximum under optimal conditions)	Receive	30m (100 feet)
	Transmit	85m (280 feet)
Power	3V Lithium-ion replaceable watch battery	
Battery Life	1 - 3 years depending on use (tag has low battery detection)	
Dimensions	85.2 mm x 54.5 mm x 8.5 mm (3.4 in x 2.1 in x 0.3 in)	
Weight	14 grams (1.0 oz)	
Case Material	ABS (Acrylonitrile Butadiene Styrene)	
Temperature	Operating	-35C to +50C (-31F to +122F)
	Storage	-40C to +85C (-40F to +185F)
Tag options	Tamper	Alarms if tag removed from optional bracket
	LED	Blinks when called
	Buzzer	Beeps when called
	Memory	0 - 128Kbit memory sizes available in 2 ^x increments



ActiveWave, Incorporated 902 Clint Moore Road, Suite 118 Boca Raton, FL 33487
Telephone: 561.999.9422 Fax: 561.999.9428

NOTE: The information in this datasheet is subject to change without notice.
Visit our web site at www.activewaveinc.com for more information on ActiveWave products.