


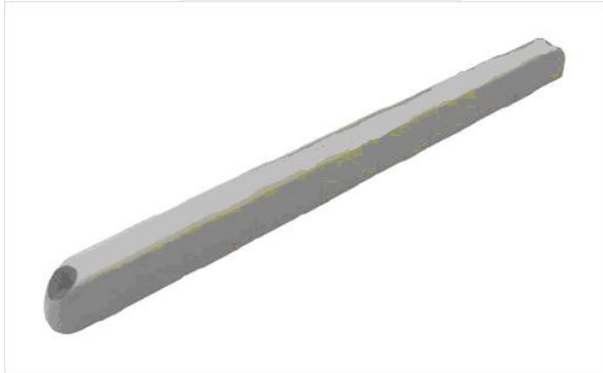

BAR SHAPE 230 mm
UHF TAG 869 MHz
Ucode HSL 2 Kbit Read Write
ISO18000-6 Type B

Description:	BAR SHAPE 230 mm UCode HSL Passive UHF TAG		
IC type:	Philips UCode HSL , Anticollision		
Data structures:	Read Only 64 bit UID number, Read Write 2048 bits	216 bytes with user definable access conditions	ISO18000-6 Type B
Physical:	Dimensions:	230mm ± 2mm x (15mm x 15mm)	± 0.5 mm
	Installation:	2 mounting holes by screw	
	Weight:	20 g	± 0.75 g
	Material:	PC + ABS High impact	Colour: Bright grey
	Logistic applications:	Non metal and metal containers, carriers, boxes, pallets.	Compliant to MH10.8.4 –Reusable containers standard
	Access applications:	Vehicles, trolleys.	
Electrical:	Operating Frequency:	869 MHz	(At room temperature 20 °C)
Thermal:	Operating Temperature:	-20 °C to +60 °C (1x 1000 h)	Peak: 120 °C (1 x 1 h)
	Storage Temperature:	-40 °C to +85 °C	
Protection class:	IP67 (20 °C, 24 h, 1 m) Resistant to mineral acids and to large number of organic acids, aqueous saline sol.		
Reading Range:	Depending on the reader design and local installation conditions up to 2.5 m		
	This TAG operates with TECTUS	TPF-80 UHF reader and antenna	TPA-50
Specials:	Mounting on metal and non metal objects possible.		
	Should be installed in the same polarization as the reader antenna.		
Part number:	UHF-19-AA		