

DM-D Series

Clear, Easy-To-Read Displays

- **DM-D205**
- **DM-D105**
- **DM-D206**
- **DM-D106**

DM Series displays are designed to provide customers with clear, easy-to-read indications at a comfortable height and viewing angle. They are also ready to handle the symbol of the Euro, the new unifying European currency. And they comply with the safety standards of countries worldwide, so they can be used virtually anywhere. Other valuable features include an extensive font table, power supply flexibility, and direct connection to any host terminal. Plus the world-standard ESC/POS® command system enabling easy download of user-defined characters and execution of macro-defined operations.

DM-D205/D105

Designed For POS Systems



Client-Friendly

Offers large, easy-to-read, 20-column, 2-line indications. Up/down, left/right adjustable display panel assures optimum viewing angle.

• OPTION •




Pole Unit
DP-105 (Pole unit)
(for DM-105)
254(H) X dia. 35mm



Small & Easy-To-Read

Panel and height adjustment possible with optional support. Ideal for restaurants and specialty stores.

Pass-Through Function

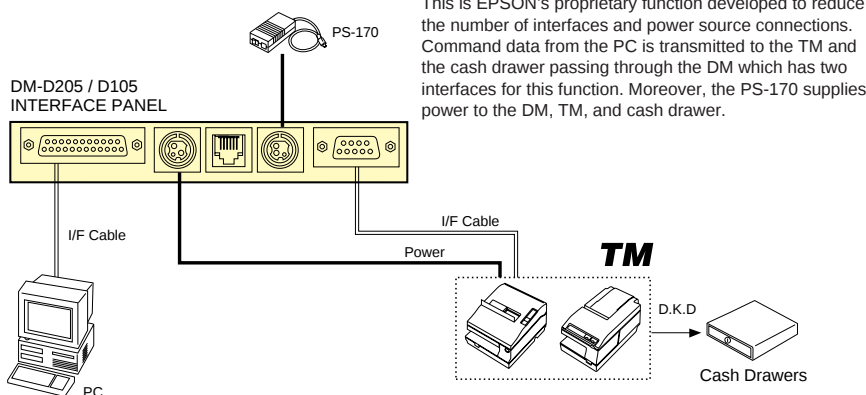

DM-D206/D106

For Direct NT/IT & TM Connection

Compact Designs

Easy-to-read, 20-column, 2-line dot matrix displays for use with EPSON IT and TM Series printers.



DM-D206



DM-D106

Direct Connection

It's easy to connect a DM Series display to an EPSON TM, IT or IR Series POS unit. You can also connect directly to your current host terminal (serial port with a 12V power supply required) for expanded system flexibility.

	DM-D205	DM-D105	DM-D206	DM-D106
Display method / Color.....	Vacuum fluorescent display / Green (505mm)			
Number of characters	40 (20 columns x 2 lines)			
Brightness	690 cd / m ²			
Character type	95 Alphanumeric characters / 37 International characters Graphic characters: 128 x 12 pages			
Character font	5 x 7 dot matrix, comma, decimal point, annunciator	5 x 7 dot matrix, cursor	5 x 7 dot matrix, comma, decimal point, annunciator	5 x 7 dot matrix, cursor
Euro symbol.....	Supported			
Character size / pitch	6.5 x 11.3mm / 9.9mm	3.5 x 5.0mm / 5.2mm	6.5 x 11.3mm/9.9mm	3.5 x 5.0mm / 5.2mm
Download characters.....	132 Characters			
Interface	RS-232		Serial	
Connection	Pass-Through Function		Direct Connection	
Baud Rate.....	38,400 bps (Max.)			
Reliability	MTBF 20,000 hours			
Power / current consumption	11.4-48 VDC / Approx. 6W			
Overall dimensions	Panel	260 (W) x 40 (D) x 83 (H)mm	165 (W) x 50.5 (D) x 69 (H)mm	260 (W) x 40 (D) x 83 (H)mm
	Base case	260 (W) x 110 (D) x 38 (H)mm	165 (W) x 110 (D) x 63 (H)mm	93 (W) x 170 (D)
	External	260 (W) x 110 (D) x 503 (H)mm	165 (W) x 110 (D) x 135 (H)mm	260 (W) x 170 (D) x 365 (H)mm
Weight	Approx. 1.1kg	Approx. 660g	Approx. 900g	Approx. 600g
Viewing angle.....	Max. 36° (3 positions)	Max. 48° (4 positions)	Max. 36° (3 positions)	Max. 48° (4 positions)
Horizontal rotation	Max. 330°	Max. 90°	Max. 330°	Max. 90°
Case Color	ECW (EPSON Cool White)			
EMC standards	VCCI class A, FCC class A, CE marking			
Safety standards	UL / USA / TÜV (EN 60950)			
Power supply	PS-170		Supplied by a TM printer	

Displays at a glance

	CONNECTION	PASS THROUGH	PRODUCT FOR
DM-D105 / 205	SERIAL I / F	YES	ALL TM Series
DM-D 106 / 206	DM-CONNECTOR	NO	TM-U950 / U925 / U375 / U675 TM-H5000II / H6000/ J8000 NT / IT