



### Overview

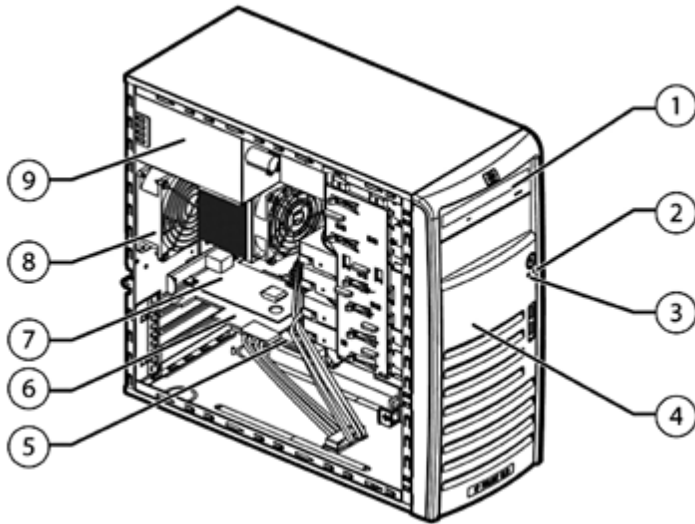

#### Front View:

1. CD-ROM Drive
2. Power LED
3. Drive Activity LED
4. Well ventilated chassis design
5. Main System Board
6. HDD controller card (Optional)
7. HP LO 100c Management Card (Optional)
8. Rear System Fan
9. 370W Power Supply

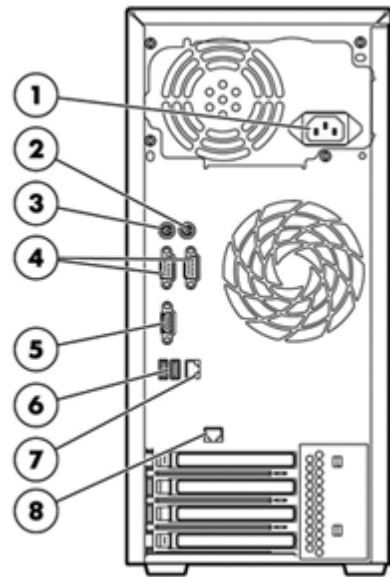

#### Rear View:

1. Power Supply Outlet
2. S/2 Mouse Port
3. PS/2 Keyboard Port
4. Serial Ports A,B
5. VGA Port
6. Rear USB 2.0 Ports
7. LAN Port (RJ-45)
8. HP Lights-Out 100 Remote Management Card Port

### What's New

- Processors:
  - Dual-Core Intel® Pentium D Processor 935 (3.2 GHz, 800 MHz FSB)
  - Dual-Core Intel® Pentium D Processor 945 (3.4 GHz, 800 MHz FSB)
- Storage Controller:
  - HP SC44Ge Host Bus Adapter
- Communications:
  - HP NC110T PCI Express Gigabit Server Adapter
- Internal Storage:
  - Support up to 1.2TB SAS max storage (4 x 300GB)

## Overview

### At A Glance

- **Processor:**
  - Dual-Core Intel® Xeon® processors 3000 sequence
  - Dual-Core Intel® Pentium® D processors 800 or 900 sequence
  - Single-Core Intel® Celeron® D processors
- **Memory**
  - 512 MB Standard / 8 GB Maximum of PC2-5300 DDR2 667 MHz ECC unbuffered Memory
- **Storage Controller:**
  - 4 Port SATA controller with Embedded RAID on Motherboard
  - HP 8 Internal Port SAS HBA with RAID
- **Internal Drive Support:**
  - 4 HDD Support:
    - 2TB SATA max storage (utilizing 500GB CTO HDD)
    - 1.2TB SAS max storage (4 x 300GB)
- **Network Controller:**
  - Embedded NC320i PCIe Gigabit Server Adapter
- **Expansion Slots:**
  - Two 32-bit/33MHz PCI at 3.3V slot
  - Two PCI-Express slots (x4 and x8, both in an x8 connector).
- **USB Ports:**
  - Six total USB ports (2 internal, 2 front, 2 rear)
- **Form Factor:**
  - Micro ATX tower
- **Management:**
  - Standard IPMI reporting
  - Lights Out 100c Remote Management Card (Optional)
- **Warranty:**
  - Protected by HP Services, including a one-year, limited warranty, Next Business Day 1 year on-site limited Global warranty - Certain restrictions and exclusions apply.

### Standard Features

**Processor**  
One of the following  
depending on Model

Dual-Core Intel Pentium D Processor 945 (3.4 GHz, 800 MHz FSB)\*  
Dual-Core Intel Pentium D Processor 935 (3.2 GHz, 800 MHz FSB)\*  
Dual-Core Intel Pentium D processor 925 (3.0 GHz, 800MHz, FSB)  
Dual-Core Intel Pentium D processor 915 (2.8 GHz, 800MHz FSB)  
Dual-Core Intel Pentium D processor 820 (2.8 GHz, 800MHz FSB)\*  
Dual-Core Intel Xeon processor 3050 (2.13 GHz, 1066MHz FSB)\*  
Dual-Core Intel Xeon processor 3040 (1.86 GHz, 1066MHz FSB)  
Single-Core Intel Celeron D processor 352 (3.20 GHz, 533MHz FSB)\*

\*Available through Configure To Order only. See Factory Integration Models section for more details..

**Cache Memory**  
One of the following  
depending on Model

1x2 MB shared Level 2 cache (Xeon sequence)  
2x2 MB Level 2 cache (Pentium D 900 sequence)  
2x1 MB Level 2 cache (Pentium D 800 sequence)  
512KB Level 2 cache (Celeron D)

**Chipset** Intel 3000

**Memory Protection** Advanced ECC

|               |          |                                         |
|---------------|----------|-----------------------------------------|
| <b>Memory</b> | Type     | PC2-5300 unbuffered DDR2 SDRAM (667MHz) |
|               | Standard | 512 MB                                  |
|               | Maximum  | 8 GB                                    |

**Network Controller** Embedded NC320i PCIe Gigabit Server Adapter

| Expansion Slots | Slot Number | Bus Speed       | Hot Plug Y/N | PCI Voltage | Notes                       |
|-----------------|-------------|-----------------|--------------|-------------|-----------------------------|
|                 | 4           | x8 PCI Express  | No           | n/a         | Full Height                 |
|                 | 3           | x4 PCI Express  | No           | n/a         | In a x8 slot<br>Full Height |
|                 | 1/2         | 32bit/33MHz PCI | No           | 3.3V        | Full Height                 |

**NOTE:** Only one brace for full length cards provided.

**Storage Controller**  
One of the following  
depending on Model

Integrated 4 port SATA controller with embedded RAID

### Standard Features

|                              |                                                                                                       |                                                                                                                                                                                                                                                   |                           |
|------------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Storage                      | CD-ROM                                                                                                | 48x IDE (ATAPI) CD-ROM Drive                                                                                                                                                                                                                      |                           |
|                              | Hard Drives                                                                                           | SATA                                                                                                                                                                                                                                              | 160GB SATA 7200 rpm Drive |
|                              |                                                                                                       | SAS                                                                                                                                                                                                                                               | 72GB SAS 15,000 rpm Drive |
| Maximum Internal Storage     | Type                                                                                                  |                                                                                                                                                                                                                                                   |                           |
|                              | SAS<br>(Not-hot plug)                                                                                 | 1.2TB                                                                                                                                                                                                                                             | (4x300GB)                 |
|                              | SATA<br>(Non-hot plug)                                                                                | 2TB                                                                                                                                                                                                                                               | (4 x 500GB*)              |
|                              | *Available through Configure To Order only. See Factory Integration Models section for more details.. |                                                                                                                                                                                                                                                   |                           |
| Interfaces                   | Parallel                                                                                              | 0                                                                                                                                                                                                                                                 |                           |
|                              | Serial                                                                                                | 2                                                                                                                                                                                                                                                 |                           |
|                              | Pointing Device (Mouse, PS2)                                                                          | 1                                                                                                                                                                                                                                                 |                           |
|                              | Graphics                                                                                              | 1                                                                                                                                                                                                                                                 |                           |
|                              | Keyboard (PS2)                                                                                        | 1                                                                                                                                                                                                                                                 |                           |
|                              | USB                                                                                                   | 6 total (2 rear, 2 front panel, 2 internal (one for USB Tape connectivity))                                                                                                                                                                       |                           |
|                              |                                                                                                       | NOTE: Internal USB ports are optimal for the attachment of HP USB DAT Tape Drives                                                                                                                                                                 |                           |
|                              |                                                                                                       | NOTE: Please see the following URL for additional information regarding USB support:<br><a href="http://h18004.www1.hp.com/products/servers/platforms/usb-support.html">http://h18004.www1.hp.com/products/servers/platforms/usb-support.html</a> |                           |
|                              | Network RJ-45 (Ethernet)                                                                              | 1                                                                                                                                                                                                                                                 |                           |
|                              | Management                                                                                            | Optional Lights-Out 100c Remote Management port                                                                                                                                                                                                   |                           |
| Graphics                     | Integrated 2MB video controller                                                                       |                                                                                                                                                                                                                                                   |                           |
| Form Factor                  | Micro ATX Tower (4U)                                                                                  |                                                                                                                                                                                                                                                   |                           |
| Industry Standard Compliance | ACPI V2.0 Compliant<br>PCI 2.3 Compliant<br>PXE Support<br>WOL Support<br>IPMI 2.0 compliance         |                                                                                                                                                                                                                                                   |                           |
| Manageability                | Embedded IPMI standard reporting<br>Optional HP ProLiant Lights-Out 100c Remote Management Card       |                                                                                                                                                                                                                                                   |                           |

### Standard Features

|                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Security                                 | Power-on password<br>Setup password                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Server Power Cords                       | 12' country specific, lowline NEMA power cord.<br><b>NOTE:</b> Rack models ship standard with a 12' IEC cable. Most redundant power supply options ship with a 6' country specific power cord. Localized cables included with geographic specific models in other world regions.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Power Supply                             | 370 Watts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| System Fans                              | 1 – non-redundant system fan shipped standard<br>1 – non-redundant CPU heatsink fan shipped standard                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| OS Support                               | Microsoft Windows Server 2003: Standard & Enterprise Edition (32 and 64 bit)<br>Microsoft Windows Small Business Server 2003<br>Microsoft Windows 2003 Server, Web Edition<br>Novell NetWare 6.5 SBS (only after SP6 release)<br>RedHat Enterprise Linux<br>SUSE Linux Enterprise Server<br><b>NOTE:</b> For an up-to-date listing of the latest ML110 G4 OS support matrix, please see:<br><a href="http://www.hp.com/go/supportos">http://www.hp.com/go/supportos</a><br><b>NOTE:</b> For an up-to-date listing of the latest drivers available for the HP server ML110 G4, please see:<br><a href="http://h18023.www1.hp.com/support/files/server/us/family/model/5769.html?lang=en&amp;cc=us">http://h18023.www1.hp.com/support/files/server/us/family/model/5769.html?lang=en&amp;cc=us</a><br><b>NOTE:</b> Drivers may also found on the base media for some Linux OS's. When configuring your server, please consult your base media driver base, or visit HP.com at:<br><a href="http://h18023.www1.hp.com/support/files/server/us/index.html">http://h18023.www1.hp.com/support/files/server/us/index.html</a><br><b>NOTE:</b> For more Linux OS support & certification information, please visit our the ProLiant & Bladesystem Server Linux matrix <a href="http://h18004.www1.hp.com/products/servers/linux/hpLinuxcert.html">http://h18004.www1.hp.com/products/servers/linux/hpLinuxcert.html</a><br><b>NOTE:</b> When installing a Windows OS Environment and configuring the embedded SATA RAID, AHCI, or SAS controllers, installation of a driver from a diskette device is required. The optional USB floppy drive (part number DC361B) is required on the ML110 G4 to accomplish this operation.<br><b>NOTE:</b> Netware 6.5 SP6 is not supported with the embedded SATA RAID. |
| Optional ProLiant Essentials Value Packs | Optional software offerings that extend the functionality of an Adaptive Infrastructure to address specific business problems and needs: <ul style="list-style-type: none"> <li>• Server Migration Pack - The Server Migration Pack automates the manual processes required for migrating servers between physical or virtual platforms (P2V, V2P, and V2V).</li> </ul> <b>NOTE:</b> For more information regarding ProLiant Essentials Software, please see the following URL:<br><a href="http://www.hp.com/servers/proliantessentials">http://www.hp.com/servers/proliantessentials</a><br><b>NOTE:</b> Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to <a href="http://www.hp.com/servers/proliantessentials">http://www.hp.com/servers/proliantessentials</a> or the various ProLiant Essentials Value Pack product QuickSpecs for more information                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

### Standard Features

#### Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and/or storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers, as well as, the MSA1000, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to <http://www.hp.com/go/factory-express>.

#### HP ProLiant Smart Buys (NA only)

The HP Smart Buy program offers mainstream business solutions at competitive prices with excellent availability and superior HP quality. It offers a wide range of industry-leading HP products at compelling prices, allowing you to receive richer configurations with additional options.

**NOTE:** ProLiant Smart Buys are available in NA only. For detailed specification information on ProLiant Smart Buys please click on the following link: <ftp://ftp.compaq.com/pub/products/servers/smartbuys.pdf>

#### HP Enterprise Configurator

The HP eCo-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance.

#### Service and Support

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of resellers and service providers. Hardware diagnostic support and repair is available for one year from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements.

**NOTE:** Limited warranty includes 1 year parts, 1 year labor, 1-year on-site support (3-1-1 warranty offered in AP only)

HP Care Pack services include coverage for the HP branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as 22" and smaller external monitors and tower UPS options up to 3kVA; these items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included, standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

HP services provide continuous care and support expertise with committed response designed to meet your IT and business needs.

To fully capitalizing on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions provides a range of support services designed to meet the varying needs of business. Whether an SMB or large global corporation HP has a ProLiant server support offer to help you speedily deploy and maximize system uptime.

Extended Care – Minimum recommended service support offer designed to ensure customers have

### Standard Features

access to expert assistance, whenever they need it.

- *4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years*

Committed Care – Cost-effective service options designed to extend HP Services committed response and guaranteed fix times, designed to speed problem resolution.

- *6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years*

Committed Response – Highest HP Support service level recommend to help increase IT performance and availability with comprehensive, consistent hardware and software services

- *Support Plus 24 - Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays*

Deployment Services – HP Installation and Start Up services designed to take time, risk, and worry out of the deployment of ProLiant servers – and free customers people to focus on what they do best, their business.

- *Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays.*

**NOTE:** For a complete listing of service offerings and information visit:

<http://www.hp.com/services/proliantservices>

<http://www.hp.com/go/proliant/carepack>

### Models

**NOTE:** ProLiant Smart Buys are available in NA only. For detailed specification information on ProLiant Smart Buys please click on the following link: <ftp://ftp.compaq.com/pub/products/servers/smartbuys.pdf>.

#### SATA Models

|                                                                |                           |                                                                          |
|----------------------------------------------------------------|---------------------------|--------------------------------------------------------------------------|
| HP ML110G4 P925<br>512MB, NHP 160GB<br>SATA (1P)<br>440288-xx1 | <b>Processor(s)</b>       | One (1) Dual-Core Intel® Pentium® D Processor 925 (3.0 GHz, 800 MHz FSB) |
|                                                                | <b>Cache Memory</b>       | 2 x 2MB Level 2 cache (Pentium 915 & Pentium 925)                        |
| HP ML110G4 3040<br>512MB, NHP 160GB<br>SATA (1P)<br>417249-xx1 | <b>Processor(s)</b>       | One (1) Dual-Core Intel Xeon 3040 Processor (1.86 GHz, 1066 MHz FSB)     |
|                                                                | <b>Cache Memory</b>       | 1 x 2MB shared Level 2 cache (Xeon 3040)                                 |
|                                                                | <b>Memory</b>             | 512 MB PC2-5300 ECC (DDR2-667Mhz) (1 x 512 MB)                           |
|                                                                | <b>Storage Controller</b> | HP Embedded 4 Port SATA Controller with embedded RAID                    |
|                                                                | <b>Hard Drive</b>         | 160GB SATA HDD                                                           |
|                                                                | <b>Internal Storage</b>   | Maximum 1TB (4 x 250GB) SATA                                             |
|                                                                | <b>Optical Drive</b>      | 48x CD-ROM                                                               |
|                                                                | <b>Form Factor</b>        | Micro ATX Tower                                                          |

#### SAS Models

|                                                       |                           |                                                                        |
|-------------------------------------------------------|---------------------------|------------------------------------------------------------------------|
| HP ML110G4 3040,<br>512MB, NHP-SAS (1P)<br>432126-xx1 | <b>Processor(s)</b>       | One (1) Dual-Core Intel® Xeon® 3040 Processor (1.86 GHz, 1066 MHz FSB) |
|                                                       | <b>Cache Memory</b>       | 1 x 2MB shared Level 2 cache (Xeon 3040)                               |
|                                                       | <b>Memory</b>             | 512 MB PC2-5300 ECC (DDR2-667Mhz) (1 x 512 MB)                         |
|                                                       | <b>Storage Controller</b> | HP 8 Internal Port SAS HBA with RAID (0,1)                             |
|                                                       | <b>Hard Drive</b>         | 72GB SAS HDD                                                           |
|                                                       | <b>Internal Storage</b>   | Maximum 1.2TB (4 x 300GB) SAS                                          |
|                                                       | <b>Optical Drive</b>      | 48x CD-ROM                                                             |
|                                                       | <b>Form Factor</b>        | Micro ATX Tower                                                        |

|                  |       |           |
|------------------|-------|-----------|
| Country Code Key | XX=00 | NA        |
|                  | XX=01 | Australia |
|                  | XX=03 | UK        |
|                  | XX=04 | Germany   |
|                  | XX=05 | France    |
|                  | XX=20 | Brazil    |
|                  | XX=37 | AP        |
|                  | XX=42 | Euro      |
|                  | XX=AA | PRC       |
|                  | XX=29 | Japan     |
|                  | XX=AB | Taiwan    |
|                  | XX=AD | Korea     |

### Configuration Information-Factory Integrated Models (North America Only)

**NOTE:** For Configure to Order requirements within EMEA region, please consult local Sales Contact.

**NOTE:** HP does not allow factory integration of options into standard models listed above.

Configure-to-order servers must start with a CTO Chassis.

**NOTE:** This product offering does not support HP Factory Express Server Configuration Level 1.

**NOTE:** FIO indicates that this option is a Factory Installable Option.

**NOTE:** This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

### Step 1: Base Configuration

|               |                                                    |            |
|---------------|----------------------------------------------------|------------|
| <b>Models</b> | HP ProLiant ML110 G4 Tower Chassis (North America) | 417710-B21 |
|               | <b>Factory Integrated Models ship with:</b>        |            |
|               | Embedded NC320i PCIe Gigabit Server Adapter        |            |
|               | Keyboard and Mouse                                 |            |
|               | 370 Watts, PFC (Power Factor Correcting)           |            |
|               | Tower Form Factor (4U)                             |            |

### Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

|                   |                                                                                               |            |
|-------------------|-----------------------------------------------------------------------------------------------|------------|
| <b>Processors</b> | Single-Core Intel Celeron D processor 352 3.20 GHz/533MHz/512 MB L2 Cache, Factory Integrated | 430934-L21 |
|                   | Dual-Core Intel Pentium D processor 925 3.0 GHz/800MHz/2x2 MB L2 Cache, Factory Integrated    | 433357-L21 |
|                   | Dual-Core Intel Pentium D Processor 935 3.2 GHz/800 MHz, 2x2 MB L2 Cache, Factory Integrated  | 440284-L21 |
|                   | Dual-Core Intel Pentium D Processor 945 3.4 GHz/800 MHz/2x2 MB L2 Cache, Factory Integrated   | 440285-L21 |
|                   | Dual-Core Intel Xeon processor 3040 1.86 GHz/1066MHz/1x2M L2 Cache, Factory Integrated        | 432125-L21 |
|                   | Dual-Core Intel Xeon processor 3050 2.13 GHz/1066MHz/1x2M L2 Cache, Factory Integrated        | 430936-L21 |

|               |                                                                             |            |
|---------------|-----------------------------------------------------------------------------|------------|
| <b>Memory</b> | 2048 MB Unbuffered Advanced ECC PC2-5300 DDR2 (1 x 2048 MB), Dual Rank      | 432806-B21 |
|               | 1024 MB Unbuffered Advanced ECC PC2-5300 DDR2 (1 x 1024 MB), Dual Rank      | 432804-B21 |
|               | 512 MB Unbuffered Advanced ECC PC2-5300 DDR2 DIMM (1 x 512 MB), Single Rank | 432803-B21 |

## Configuration Information-Factory Integrated Models (North America Only)

|             |                                                                  |            |
|-------------|------------------------------------------------------------------|------------|
| Hard Drives | <b>Serial ATA (SATA) – Non-hot Plug HDD (SATA or SAS Models)</b> |            |
|             | HP 80GB 1.5G SATA 7.2K NHP 3.5" HDD                              | 383410-B21 |
|             | HP 160GB 1.5G SATA 7.2K NHP 3.5" HDD                             | 411275-B21 |
|             | HP 250GB 1.5G SATA 7.2K NHP 3.5" HDD                             | 411276-B21 |
|             | HP 500GB 1.5G SATA 7.2K NHP 3.5" HDD, FIO*                       | 404469-B21 |
|             | <b>*NOTE: Factory Integrated Only</b>                            |            |
|             | <b>Serial Attached SCSI (SAS) Non-Hot Plug (SAS Models Only)</b> |            |
|             | HP 300GB SAS 3.5" 15K NHP                                        | 431950-B21 |
|             | HP 146GB SAS 3.5" 15K NHP                                        | 432093-B21 |
|             | HP 72GB SAS 3.5" 15K NHP                                         | 432095-B21 |

|                |                                                                                                                                                                                                     |            |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Optical Drives | CD-RW/DVD-ROM Combo Drive Option Kit                                                                                                                                                                | 331346-B21 |
|                | HP DVD+R/RW 8X HH                                                                                                                                                                                   | 383974-B21 |
|                | HP ProLiant 48X CD                                                                                                                                                                                  | 398972-B21 |
|                | DVD ROM Drive 16x                                                                                                                                                                                   | 217053-B21 |
|                | <b>NOTE: For the installation of Windows and other OS's, a floppy drive (DC361B) may be required to complete driver installation. A USB drive key may not work to complete driver installation.</b> |            |

## Step 3: Choose Additional Options for Factory Integration

**NOTE:** For additional options, please refer to the "Options" section below.

**NOTE:** Some options may not be factory integratable. Please contact your local sales representative for additional information.

|                   |                                                                |            |
|-------------------|----------------------------------------------------------------|------------|
| Operating Systems | <b>Pre-install Microsoft Windows 2003 SBS Standard Edition</b> |            |
|                   | MS W2003 SBS R2 Std 1XX FIO Eng SW                             | 432564-xx1 |
|                   | MS W2003 SBS R2 Prm 1XX FIO Eng SW                             | 432566-xx1 |

|                  |       |           |
|------------------|-------|-----------|
| Country Code Key | xx=00 | NA        |
|                  | xx=01 | Australia |
|                  | xx=03 | UK        |
|                  | xx=04 | Germany   |
|                  | xx=05 | France    |
|                  | xx=06 | Italy     |
|                  | xx=07 | Spanish   |
|                  | xx=20 | Brazil    |
|                  | xx=21 | Hungarian |
|                  | xx=22 | Czech     |
|                  | xx=24 | Polish    |
|                  | xx=33 | Dutch     |
|                  | xx=37 | AP        |
|                  | xx=42 | Euro      |
|                  | xx=AA | PRC       |
|                  | xx=29 | Japan     |
|                  | xx=AB | Taiwan    |

*Configuration Information-Factory Integrated Models (North America Only)*

xx=AD

Korea

### Options

|                                          |                                                                                                                                                                                                                        |            |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Optional ProLiant Essentials Value Packs | ProLiant Essentials Server Migration Pack                                                                                                                                                                              |            |
|                                          | ProLiant Essentials Server Migration Pack, No Media, 1-Migration License<br><b>NOTE:</b> This license allows 1 P2V, V2P, or V2V migration. Contains one license with a unique license activation key and documentation | 435663-B21 |
| Memory                                   | 2048 MB Unbuffered Advanced ECC PC2-5300 DDR2 (1x2048 MB), Dual Rank                                                                                                                                                   | 432806-B21 |
|                                          | 1024 MB Unbuffered Advanced ECC PC2-5300 DDR2 (1x1024 MB), Dual Rank                                                                                                                                                   | 432804-B21 |
|                                          | 512 MB Unbuffered Advanced ECC PC2-5300 DDR2 (1x512 MB), Single Rank                                                                                                                                                   | 432803-B21 |
| Optical Drives                           | CD-RW/DVD-ROM Combo Drive Option Kit                                                                                                                                                                                   | 331346-B21 |
|                                          | 48X CD-ROM Option, Carbon                                                                                                                                                                                              | 398972-B21 |
|                                          | DVD-RW Drive Option Kit                                                                                                                                                                                                | 383974-B21 |
|                                          | 1.44 MB USB Diskette Drive                                                                                                                                                                                             | DC361B     |
|                                          | <b>NOTE:</b> For the installation of Windows and other OS's, a floppy drive may be required to complete driver installation. A USB drive key may not work to complete driver installation.                             |            |
| Hard Drives                              | <b>Serial – ATA (SATA) – Non-Hot Plug (SATA Models Only)</b>                                                                                                                                                           |            |
|                                          | HP 80GB 1.5G SATA 7.2K NHP 3.5" HDD                                                                                                                                                                                    | 383410-B21 |
|                                          | HP 160GB 1.5G SATA 7.2K NHP 3.5" HDD                                                                                                                                                                                   | 411275-B21 |
|                                          | HP 250GB 1.5G SATA 7.2K NHP 3.5" HDD                                                                                                                                                                                   | 411276-B21 |
|                                          | <b>NOTE:</b> When purchasing systems with the 500GB Non-Hot Plug SATA drives, please reference the Configuration Information Section of this QuickSpecs to order via Configuration to Order.                           |            |
|                                          | <b>NOTE:</b> The purchase of additional SATA hard drives requires the purchase of additional HP 1-Port SATA RAID Cables, (P/N 413748-B21)                                                                              |            |
|                                          | <b>Serial Attached SCSI (SAS) Non-Hot Plug (SAS Models Only)</b>                                                                                                                                                       |            |
|                                          | HP 300GB SAS 3.5" 15K NHP                                                                                                                                                                                              | 431950-B21 |
|                                          | HP 146GB SAS 3.5" 15K NHP                                                                                                                                                                                              | 432093-B21 |
|                                          | HP 72GB SAS 3.5" 15K NHP                                                                                                                                                                                               | 432095-B21 |
|                                          | <b>NOTE:</b> The purchase of SAS hard drives requires the purchase of HP Internal SAS/SATA 4-Port Cable (P/N 430479-B21). This cable is standard in the SAS BTO model.                                                 |            |
|                                          | <b>NOTE:</b> The purchase of SAS HBA or array controller is required.                                                                                                                                                  |            |

### Options

|                                   |                                                                                                                                                                                                                                         |            |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Storage Controllers               | HP SC44Ge Host Bus Adapter                                                                                                                                                                                                              | 416096-B21 |
|                                   | HP SC11Xe Host Bus Adapter                                                                                                                                                                                                              | 412911-B21 |
|                                   | HP 8 Internal Port SAS HBA with RAID                                                                                                                                                                                                    | 347786-B21 |
|                                   | <b>NOTE:</b> PCI-X Interface (PCI 32bit/33MHz compatible)                                                                                                                                                                               |            |
|                                   | 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2                                                                                                                                                                                      | 374654-B21 |
|                                   | <b>NOTE:</b> PCI-X Interface (PCI 32bit/33MHz compatible)                                                                                                                                                                               |            |
|                                   | HP Smart Array E200/128 BBWC Controller                                                                                                                                                                                                 | 411508-B21 |
|                                   | 128MB Battery-Backed Write Cache Enabler                                                                                                                                                                                                | 351580-B21 |
|                                   | <b>NOTE:</b> Supports the Smart Array E200 Controller, Smart Array 641 Controller and Smart Array 642 Controller.                                                                                                                       |            |
|                                   | HP 1-Port SATA RAID Cable                                                                                                                                                                                                               | 413748-B21 |
| Communications                    | <b>NOTE:</b> The purchase of SATA hard drives requires the purchase of the HP 1-Port SATA RAID Cable (P/N 430479-B21) for each additional hard drive.                                                                                   |            |
|                                   | HP Internal SAS/SATA 4-Port Cable                                                                                                                                                                                                       | 430479-B21 |
|                                   | <b>NOTE:</b> The purchase of a SAS Storage Controller requires the purchase of HP SAS/SATA 4-Port Cable (P/N 430479-B21)                                                                                                                |            |
|                                   | <b>NOTE:</b> SAS Storage Controllers will run both SATA and SAS drives.                                                                                                                                                                 |            |
| Communications                    | HP NC110T PCI Express Gigabit Server Adapter                                                                                                                                                                                            | 434905-B21 |
|                                   | <b>NOTE:</b> Does not support Windows 2000.                                                                                                                                                                                             |            |
|                                   | HP NC150T PCI 4-port Gigabit Combo Switch Adapter                                                                                                                                                                                       | 367132-B21 |
|                                   | HP NC360T PCI Express Dual Port Gigabit Server Adapter                                                                                                                                                                                  | 412648-B21 |
|                                   | Agere 2006 PCI Hi-Speed 56K Modem                                                                                                                                                                                                       | 440519-B21 |
| Tape Drives                       | <b>NOTE:</b> Installation of SCSI internal tape drives in a ML110 G4 model requires SCSI controller kit (PN: 374654-B21).                                                                                                               |            |
|                                   | <b>NOTE:</b> For complete listing of tape drive offerings see:<br><a href="http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html">http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html</a> |            |
|                                   | <b>USB Tape Drives</b>                                                                                                                                                                                                                  |            |
|                                   | HP StorageWorks DAT 24 USB Internal Tape Drive (Carbonite)                                                                                                                                                                              | DW069A     |
|                                   | HP StorageWorks DAT 40 USB Internal Tape Drive (Carbonite)                                                                                                                                                                              | DW022A     |
|                                   | HP StorageWorks DAT 72 USB Internal Tape Drive (Carbonite)                                                                                                                                                                              | DW026A     |
|                                   | <b>DAT Tape Drives</b>                                                                                                                                                                                                                  |            |
|                                   | HP StorageWorks DAT 40 SCSI Internal Tape Drive (Carbon)                                                                                                                                                                                | C5686C     |
| Installation of Server into Racks | HP StorageWorks DAT 72 SCSI Internal Tape Drive (Carbon)                                                                                                                                                                                | Q1522B     |
|                                   | ProLiant Rack Enabling Kit                                                                                                                                                                                                              | 417705-B21 |
| Lights Out Management Card        | Lights-Out Management Card Kit for ML110 G4                                                                                                                                                                                             | 418280-B21 |

### Options

|                       |                                                                                                                                                                                                                                                                                                          |            |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| UPS                   | HP T1000 UPS, JPN/TWN                                                                                                                                                                                                                                                                                    | AF404A     |
|                       | HP T1000 UPS, NA                                                                                                                                                                                                                                                                                         | AF403A     |
|                       | HP T1000 UPS, INTL                                                                                                                                                                                                                                                                                       | AF405A     |
|                       | HP T750 UPS, Low Voltage (NA/JPN)                                                                                                                                                                                                                                                                        | 378439-D71 |
|                       | HP T750 UPS, High Voltage (INTL)                                                                                                                                                                                                                                                                         | 378439-B31 |
| <hr/>                 |                                                                                                                                                                                                                                                                                                          |            |
| USB Options           | HP 1GB USB 2.0 Floppy Drive Key                                                                                                                                                                                                                                                                          | 442085-B21 |
|                       | HP 256MB USB 2.0 Floppy Drive Key                                                                                                                                                                                                                                                                        | 442084-B21 |
|                       | HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)                                                                                                                                                                                                                                                  | DC172B     |
|                       | HP USB 04 Standard Keyboard                                                                                                                                                                                                                                                                              | DT528A#xxx |
|                       | USB 2.0 4-port HUB                                                                                                                                                                                                                                                                                       | DG954A     |
| <hr/>                 |                                                                                                                                                                                                                                                                                                          |            |
| HP KVM Switch Options | HP 1x4 Console Switch                                                                                                                                                                                                                                                                                    | AF611A     |
|                       | HP PS2 Server Console Cable, 6 foot, 2-Pack                                                                                                                                                                                                                                                              | AF612A     |
|                       | HP USB Server Console Cable, 6 foot, 2-Pack                                                                                                                                                                                                                                                              | AF613A     |
|                       | <b>NOTE:</b> required for supporting USB peripherals.<br><b>NOTE:</b> For additional information regarding KVM Switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL:<br><a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> |            |

Service and Support, HP Care Pack, and Warranty Information

|                                                       |                                                                                                                                                           |        |
|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Service and Support Offerings (HP Care Pack Services) | <b>Hardware Services 4-Hour On-site Service</b>                                                                                                           |        |
|                                                       | 13-Hour x 5-Day Coverage, 3 Years                                                                                                                         | U4434E |
|                                                       | 24-Hour x 7-Day Coverage, 3 Years                                                                                                                         | U4435E |
|                                                       | <b>Hardware Services Next Business Day On-Site Service</b>                                                                                                |        |
|                                                       | 9-Hour x 5-Day Coverage, 3 Years                                                                                                                          | U4433E |
|                                                       | <b>Hardware Services 6 Hour Call-to-Repair</b>                                                                                                            |        |
|                                                       | 24-Hour x 7-Day Coverage, 3 Years, 6 Hour Call-to-Repair                                                                                                  | U4436E |
|                                                       | <b>Hardware Installation Service</b>                                                                                                                      |        |
|                                                       | HP Install ProLiant ML110 Service                                                                                                                         | U4444E |
|                                                       | <b>NOTE:</b> For more information, customer/resellers can contact <a href="http://www.hp.com/services/carepack">http://www.hp.com/services/carepack</a> . |        |

Memory

HP ProLiant ML110 G4 Models

Standard Memory

512 MB of PC2-5300 DDR2 SDRAM running at 512 MB with Advanced ECC capabilities Memory installed (1 x 512 MB SDRAM DIMM).

Standard Memory Plus Optional Memory

Up to 5120 MB memory is available with the optional installation of PC2-5300 un-buffered ECC DDR2 SDRAM DIMM Memory kits.

Standard Memory Replaced with Optional Memory

Up to 8192 MB of memory is available with the removal of the standard 512 MB of memory and the optional installation of PC2-5300 un-buffered ECC DDR2 SDRAM DIMM Memory kits.


**NOTE:** The below chart does not represent all possible memory configurations.  
**NOTE:** In memory configurations requiring 2 DIMM and 4 DIMM configurations, the memory must be paired for optimal performance. This means that DIMMs in slot 1 and 3 have to be identical, in slot 2 and 4 have to be identical. (For example, the Optional memory configuration shown below)

| Memory   |         | Slot    |         |         |         |
|----------|---------|---------|---------|---------|---------|
|          |         | 4       | 3       | 2       | 1       |
| Standard | 512 MB  | Empty   | Empty   | Empty   | 512 MB  |
| Optional | 5120 MB | 2048 MB | 512 MB  | 2048 MB | 512 MB  |
| Maximum  | 8192 MB | 2048 MB | 2048 MB | 2048 MB | 2048 MB |

Following are memory options available from HP:

|                                                                             |            |
|-----------------------------------------------------------------------------|------------|
| 2048 MB Unbuffered Advanced ECC PC2-5300 DDR2 (1 x 2048 MB), Dual Rank      | 432806-B21 |
| 1024 MB Unbuffered Advanced ECC PC2-5300 DDR2 (1 x 1024 MB), Dual Rank      | 432804-B21 |
| 512 MB Unbuffered Advanced ECC PC2-5300 DDR2 DIMM (1 x 512 MB), Single Rank | 432803-B21 |

Storage

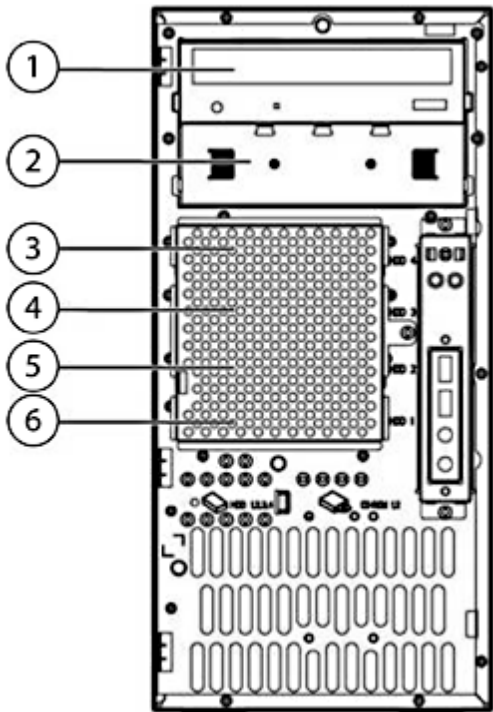

- 1 48x IDE (ATAPI) CD-ROM
- 2 Removable Media Bays (1.6" each)
- 3, 4, 5, 6 Four (4) Non-Hot Plug Drive Bays

Drive Support

|                  | Quantity Supported | Position Supported | Controller             |
|------------------|--------------------|--------------------|------------------------|
| Removable Media  |                    |                    |                        |
| DVD + CDRW Drive | 2                  | 1 or 2             | Integrated IDE (ATAPI) |
| DVD-RW Drive     | 2                  | 1 or 2             | Integrated IDE (ATAPI) |

Hard Drives (SATA Models only)

SATA 1.5Gb – Non-Hot Plug

|                  | Quantity Supported | Position Supported | Controller                                               |
|------------------|--------------------|--------------------|----------------------------------------------------------|
| 3.5-inch         | Up to 4            | 3,4,5,6            | 4 Port SATA controller with Embedded RAID on Motherboard |
| 80GB 7.2K, SATA  |                    |                    |                                                          |
| 160GB 7.2K, SATA |                    |                    |                                                          |
| 250GB 7.2K SATA  |                    |                    |                                                          |
| 500GB 7,2K SATA  |                    |                    |                                                          |

## Storage

### Hard Drives (SAS Models only)

#### SAS – Non-Hot Plug

|                                                                    | Quantity<br>Supported | Position<br>Supported | Controller                                 |
|--------------------------------------------------------------------|-----------------------|-----------------------|--------------------------------------------|
| <b>3.5-inch</b><br>72GB 15K, SAS<br>145GB 15K SAS<br>300GB 15K SAS | Up to 4               | 3,4,5,6               | HP 8 Internal Port SAS HBA with RAID (0,1) |

### Maximum Storage Capacity – SATA/SAS Models

|          |             |                                              |
|----------|-------------|----------------------------------------------|
| Internal | <b>SATA</b> | 1TB (4x250GB (BTO))<br>2TB (4 x 500GB (CTO)) |
|          | <b>SAS</b>  | 1.2TB (4x300GB)                              |
| Total    | <b>SATA</b> | 1TB (4x250GB (BTO))<br>2TB (4 x 500GB (CTO)) |
|          | <b>SAS</b>  | 1.2TB (4x300GB)                              |

### Tape Drives

**NOTE:** A SCSI controller needs to be purchased to operate internal SCSI devices in the SATA Models.

**NOTE:** For an up-to-date listing of the latest O/S Support details for each of the Tape Drives listed below, please see the following:  
<http://h18000.www1.hp.com/products/quickspecs/Division/10233.html> (Worldwide)

|                                                                           | Position<br>Supported | Controller                                         | Controller/HBA<br>Option Kit Part<br>Number |
|---------------------------------------------------------------------------|-----------------------|----------------------------------------------------|---------------------------------------------|
| <b>Internal USB Tape Drives</b><br>DAT 24 USB<br>DAT 40 USB<br>DAT 72 USB | 2                     | USB 2.0 port                                       | N/A                                         |
| <b>External USB Tape Drives</b><br>DAT 24 USB<br>DAT 40 USB<br>DAT 72 USB | External              | USB 2.0 port                                       | N/A                                         |
| <b>Internal SCSI Tape Drives</b><br>DAT 40<br>DAT 72                      | 2                     | 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 | 374654-B21                                  |
| <b>External SCSI Tape Drives</b><br>DAT 40<br>DAT 72                      | External              | 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 | 374654-B21                                  |

## Power Specifications

|                                        |                                          |
|----------------------------------------|------------------------------------------|
| Part Number                            | 416121-001                               |
| Spare Kit                              | 419029-001                               |
| Operational Input Voltage Range (Vrms) | 100 to 127 and 200 to 240 V auto ranging |
| Frequency Range (Nominal) (Hz)         | 50 to 60 Hz                              |

| Nominal Input Voltage (Vrms)           | 100              | 115                                                    | 208 | 220 | 230                                                    | 240 |
|----------------------------------------|------------------|--------------------------------------------------------|-----|-----|--------------------------------------------------------|-----|
| Max Rated Output Wattage Rating        | N/A              | 370                                                    | N/A | N/A | 370                                                    | N/A |
| Nominal Input Current (A rms)          | N/A              | 8                                                      | N/A | N/A | 4                                                      | N/A |
| Max Rated Input Wattage Rating (Watts) | N/A              | N/A                                                    | N/A | N/A | N/A                                                    | N/A |
| Max. Rated VA (Volt-Amp)               | N/A              | N/A                                                    | N/A | N/A | N/A                                                    | N/A |
| Efficiency (%)                         | N/A              | >65%                                                   | N/A | N/A | >65%                                                   | N/A |
| Power Factor                           | N/A              | N/A                                                    | N/A | N/A | N/A                                                    | N/A |
| Leakage Current (mA)                   | 0.25mA (at 60HZ) | N/A                                                    | N/A | N/A | N/A                                                    | N/A |
| Maximum Inrush Current (A peak)        | N/A              | No component was damaged and input fuse shall not blow | N/A | N/A | No component was damaged and input fuse shall not blow | N/A |
| Maximum Inrush Current duration (mS)   | N/A              | N/A                                                    | N/A | N/A | N/A                                                    | N/A |

## System Specifications

|                                                          |                                                                                                                                                                       |
|----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                          | <b>Power **</b>                                                                                                                                                       |
| <b>HP ProLiant ML110 G4 Fully Configured</b>             | (see **)                                                                                                                                                              |
| Fully Loaded System output Wattage (W)                   | 370W                                                                                                                                                                  |
| Fully Loaded System Input Current (A rms)                | 8A @ 115V, 4A @ 230V                                                                                                                                                  |
| Fully Loaded System Thermal (BTU- Hr)                    | 1907BTU                                                                                                                                                               |
| Fully Loaded System VA (Volt-Amp)                        | 920                                                                                                                                                                   |
| System Leakage with all power supplies loaded (mA)       | 0.75mA@240V<br>0.45mA@120V                                                                                                                                            |
| System Inrush Current with all power supplies loaded (A) | 80A                                                                                                                                                                   |
| Power cord requirements                                  | Nema 5-15P to IEC320-C13                                                                                                                                              |
|                                                          | IEC320-C13 to IEC320-C14                                                                                                                                              |
|                                                          | **Power shown is for a fully configured system consisting of (1) CPU, (4) double-sided DIMMs, (4) HDDs, (1) CD-ROM, (1) DVD-ROM, (4) PCI cards, and (1) power supply. |
| <b>Power Cords (13 Cord Sets)</b>                        | <b>Power Cord Part Number</b>                                                                                                                                         |
| <b>Country</b>                                           |                                                                                                                                                                       |
| APD                                                      | 100614-009, 100613-008, 139867-004, 187487-004 (India)                                                                                                                |
| Brazil                                                   | 285052-001                                                                                                                                                            |
| Australia                                                | 100661-001                                                                                                                                                            |
| Euro                                                     | 100614-009                                                                                                                                                            |
| France                                                   | 100614-009                                                                                                                                                            |
| Germany                                                  | 100614-009                                                                                                                                                            |
| Japan                                                    | 139867-004                                                                                                                                                            |
| PRC                                                      | 286496-001                                                                                                                                                            |
| UK                                                       | 100613-008                                                                                                                                                            |
| US, Taiwan                                               | 121565-001                                                                                                                                                            |

Technical Specifications

|                |                                                    |                                                                                                     |                                |  |
|----------------|----------------------------------------------------|-----------------------------------------------------------------------------------------------------|--------------------------------|--|
| System Unit    | Dimensions (HxWxD)<br>(with feet)                  | 14.46 x 6.88 x 16.76 in (36.7 x 17.5 x 42.6 cm)                                                     |                                |  |
|                | Weight (approximate)                               | 23.15 lb (10.5 kg)                                                                                  |                                |  |
|                | Input Requirements<br>(per power supply)           | Range Input Voltage                                                                                 | 100 to 127 VAC/200 to 240 VAC  |  |
|                |                                                    | Normal Line Voltage                                                                                 | 115 or 230 VAC                 |  |
|                | Line Frequency                                     | 50 to 60 Hz                                                                                         |                                |  |
|                | Rated Input Current                                | load 8A at 115VAC, 4A at 230VAC                                                                     |                                |  |
|                | BTU Rating                                         | 1907 BTU                                                                                            |                                |  |
|                | SCSI Connectors<br>(SCSI Models only)              | One internal LVD/SE connector for U160 devices, plus two internal SE connectors for legacy devices. |                                |  |
|                | Power Supply Output<br>Power<br>(per power supply) | Rated Steady-State Power                                                                            | 370W                           |  |
|                |                                                    | Maximum Peak Power                                                                                  | 370W                           |  |
|                | Temperature Range                                  | Operating                                                                                           | 50° to 95° F (10° to 35° C)    |  |
|                |                                                    | Shipping                                                                                            | -40° to 140° F (-40° to 60° C) |  |
|                | Relative Humidity<br>(non-condensing)              | Operating                                                                                           | 10% to 90%                     |  |
|                |                                                    | Non-operating                                                                                       | 10% to 90%                     |  |
| Acoustic Noise | Idle<br>(Fixed Disk Drives<br>Spinning)            | L WAd (BELS)                                                                                        | 5.5                            |  |
|                |                                                    | Operating<br>(Random Seeks to Fixed<br>Disks)                                                       |                                |  |
|                |                                                    | L WAd (BELS)                                                                                        | 6.0                            |  |
|                |                                                    |                                                                                                     |                                |  |

---

|                                                       |                 |                                                  |                             |             |  |
|-------------------------------------------------------|-----------------|--------------------------------------------------|-----------------------------|-------------|--|
| HP 160GB 1.5G SATA<br>7.2K NHP 3.5" HDD<br>411275-B21 | 160GB 7,200 rpm | Capacity                                         | 160,041 MB                  |             |  |
|                                                       |                 | Height                                           | 1.0 in. (26.1 mm)           |             |  |
|                                                       |                 | Width                                            | 4.0 in. (101.6 mm)          |             |  |
|                                                       |                 | Interface                                        | Serial ATA                  |             |  |
|                                                       |                 | Transfer rate synchronous<br>(maximum)           | 1.5 Gb/s                    |             |  |
|                                                       |                 | Seek time (typical reads,<br>including settling) | Single track                | 0.9 ms      |  |
|                                                       |                 |                                                  | Average                     | 9.0 ms      |  |
|                                                       |                 |                                                  | Full-stroke                 | 17.8 ms     |  |
|                                                       |                 |                                                  | Rotational speed            | 7,200 rpm   |  |
|                                                       |                 | Physical Configuration                           | Bytes/Sector                | 512         |  |
|                                                       |                 |                                                  | Logical Blocks              | 312,581,808 |  |
|                                                       |                 | Operating Temperature                            | 41° to 131° F (5° to 55° C) |             |  |

Technical Specifications

|                                               |                                               |                    |            |
|-----------------------------------------------|-----------------------------------------------|--------------------|------------|
| NHP 72GB 3G SAS 15K<br>3.5" HDD<br>431950-B21 | Capacity                                      | 73,407,856,856     |            |
|                                               | Height                                        | 1.0 in (25.4mm)    |            |
|                                               | Width                                         | 4.0 in. (101.6 mm) |            |
|                                               | Interface                                     | SAS                |            |
|                                               | Transfer rate synchronous (maximum)           | 3 Gb/sec           |            |
|                                               | Seek time (typical reads, including settling) | Single track       | 0.27 ms    |
|                                               |                                               | Average            | 3.5 ms     |
|                                               |                                               | Full-stroke        | 3.5 ms     |
|                                               |                                               | Rotational speed   | 15,000 rpm |
|                                               | Physical Configuration                        | Bytes/Sector       | 512        |
| Logical Blocks                                |                                               | 143,374,737        |            |
| Operating Temperature                         | 50° to 95° F (10° to 35° C)                   |                    |            |

|                                                         |                         |                                                                                                                                               |                                             |  |
|---------------------------------------------------------|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|--|
| 48X Max IDE (ATAPI) CD- Disk<br>ROM Drive<br>398972-B21 | Applicable Disk         | CD-ROM, CD-XA, CD-DA<br>(Mode 1, Mode 2, Form 1 and 2)<br>Photo CD (Single and Multi-session)<br>Mixed Mode (Audio and Data combined)<br>CD-R |                                             |  |
|                                                         | Capacity                | 540MB (Mode 1, 12 cm)<br>650MB (Mode 2, 12 cm)                                                                                                |                                             |  |
|                                                         | Block Size              | Mode 1                                                                                                                                        | 2,048 bytes, 1024 bytes                     |  |
|                                                         |                         | Mode 2                                                                                                                                        | 2,340 bytes, 2,336 bytes, 1024 bytes        |  |
|                                                         |                         | CD-DA                                                                                                                                         | 2,352 bytes                                 |  |
|                                                         |                         | CD-XA                                                                                                                                         | 2,328 bytes                                 |  |
|                                                         | Interface               | IDE (ATAPI)                                                                                                                                   |                                             |  |
|                                                         | Access Times (typical)  | Random                                                                                                                                        | <100 ms                                     |  |
|                                                         |                         | Full-Stroke                                                                                                                                   | <150 ms                                     |  |
|                                                         | Data Transfer Rate      | Sustained                                                                                                                                     | 3000 to 7200 KB/s (20X to 48X)              |  |
|                                                         |                         | Burst                                                                                                                                         | 150 KBps to 7,200 KBps                      |  |
|                                                         |                         | Bus Rate                                                                                                                                      | 16.7 MBps                                   |  |
|                                                         | Cache Buffer            | 128 KB                                                                                                                                        |                                             |  |
|                                                         | Start-up Time (typical) | < 7 seconds                                                                                                                                   |                                             |  |
|                                                         | Stop Time               | < 4 seconds                                                                                                                                   |                                             |  |
|                                                         | Laser Parameters        | Type                                                                                                                                          | Semiconductor Laser GaAlAs                  |  |
|                                                         |                         | Wave Length                                                                                                                                   | 780 ± 25 nm                                 |  |
|                                                         | Operating Conditions    | Temperature                                                                                                                                   | 41° to 122° F (5° to 50° C)                 |  |
|                                                         |                         | Humidity                                                                                                                                      | 10% to 90%                                  |  |
|                                                         | Dimensions              | (HxWxD, maximum)                                                                                                                              | 1.63 x 5.75 x 7.87 in (41.3 x 146 x 200 cm) |  |
|                                                         |                         | Weight                                                                                                                                        | 2.64 lb (1.2 kg)                            |  |

Technical Specifications

|                                             |                       |                                                      |          |
|---------------------------------------------|-----------------------|------------------------------------------------------|----------|
| 4 port Embedded SATA controller             | SATA Protocol         | SATA 1.5Gb/s                                         |          |
|                                             | SATA Ports            | 4 internal                                           |          |
|                                             | Port transfer rate    | 1.5 Gb/s total                                       |          |
|                                             | Maximum Capacity      | up to 2 TB (4 x 500GB non hot plug SATA HDD)         |          |
|                                             | RAID Levels Supported | RAID 1+0 (Striping & Mirroring)                      |          |
|                                             |                       | RAID 1 (Mirroring)                                   |          |
| RAID 0 (Striping)                           |                       |                                                      |          |
| Logical RAID Volumes Supported              |                       |                                                      |          |
|                                             |                       |                                                      |          |
| Embedded NC320i PCIe Gigabit Server Adapter | Network Interface     | 10Base-T/100Base-TX/1000Base-TX                      |          |
|                                             | Compatibility         | IEEE 802.3 10Base-T                                  |          |
|                                             |                       | IEEE 802.3ab 1000Base-T                              |          |
|                                             |                       | IEEE 802.3u 100Base-TX                               |          |
|                                             |                       |                                                      |          |
|                                             | Data Transfer Method  | Single lane (x1), 100MHz PCI Express Reference Clock |          |
|                                             | Network Transfer Rate | 10Base-T (Half-Duplex)                               | 10 Mb/s  |
|                                             |                       | 10Base-T (Full-Duplex)                               | 20 Mb/s  |
|                                             |                       | 100Base-TX (Half-Duplex)                             | 100 Mb/s |
|                                             |                       | 100Base-TX (Full-Duplex)                             | 200 Mb/s |
|                                             |                       | 1000Base-TX (Half and Full-Duplex)                   | 2000Mb/s |
|                                             |                       |                                                      |          |
|                                             | Connector             | RJ-45 connector                                      |          |
| Cable Support                               | 10Base-T              | Categories 3, 4 or 5 UTP; up to 328 ft (100 m)       |          |
|                                             | 10/100/1000Base-TX    | Category 5 UTP; up to 328 ft (100 m)                 |          |

© Copyright 2007 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.