

Metrologic

MS900 Series



Metrologic®



Automatic Laser Scanner

Metrologic's MS900 Series hand-held laser scanners provide unsurpassed versatility and adaptability. In these innovative scanners, Metrologic has engineered the best of two worlds: the increased depth of field, accuracy, and high performance of a laser with the durable construction and low cost of a CCD. The MS900 also has a unique patented infrared sensor and control scheme that provides fully automatic activation and operation for complete hands-free scanning.

The MS900 can be used either as a hand-held scanner or fixed scanner because of its unique design. An operator can simply "wave" the scanner in a natural position across a bar code and the MS900 will scan automatically. This automatic operation increases worker efficien-

Features

- **Patented automatic trigger**
- **Combination hand-held/fixed projection**
- **Short-range and long-range activation**
- **Superior ergonomics**
- **Rugged and reliable**
- **Easy to program**
- **Low cost**

cy and productivity by allowing faster throughput. This added operator comfort reduces the risk of repetitive strain injury.

The versatile MS900 can operate as a "hands-free" scanner when placed in its flexible, fixed stand. An operator can present bar coded items to the MS900 for automatic scanning. Special patents also make it possible to program the scanner for short-range and long-range laser activation in either the hand-held or hands-free mode.

The MS900 series consists of three models: the undecoded MS941; the standard decode MS951; and the MS961 decoded with high density code reading capabilities.



OPERATIONAL

Light Source	Visible Laser Diode 675 nm $\pm$ 5 nm
Depth of Field*	0 mm - 200 mm (0" - 8")
Scan Speed	36 scan lines per second
Scan Pattern	Single scan line
Minimum Bar Width	MS961: 0.13 mm (5.0 mil) MS951: 0.19 mm (7.5 mil) MS941: 0.19 mm (7.5 mil)
Long Range Activation	minimum: 0 mm - 200 mm (0" - 8"); typical: 0 mm - 280 mm (0" - 11")
Short Range Activation	minimum: 0 mm - 75 mm (0" - 3"); typical: 0 mm - 125 mm (0" - 5")
Decode Capability	MS951/961: Autodiscriminates all standard bar codes; MS941: Non-decode only
System Interfaces	MS951/961: RS232, Light Pen Emulation, OCIA, IBM 46XX, PC Keyboard Wedge, Stand-Alone Keyboard MS941: Decoder dependent
Print Contrast	35% minimum reflectance difference
Number Characters Read	Up to 80 data characters (Maximum number will vary based on symbology and density)
Roll, Pitch, Yaw	42°, 68°, 52°
Beeper Operation	MS951/961: 3 tones or no beep MS941: Decoder dependent
Indicators (LED)	MS951/961: Red = laser on, ready to scan; Green = good read MS941: decoder dependent

MECHANICAL

Dimensions	205 mm x 63 mm x 24 mm (8.0" x 2.5" x 0.94")
Weight	MS951/961: 177 g (6.20 oz) MS941: 156 g (5.45 oz)
Cable (coiled)	Collapsed: 146.3 cm (4.8'); Extended: 243.8 cm (8')

ELECTRICAL

Input Voltage	5 VDC $\pm$ 0.25 V
Power	MS951/961: 0.8 w MS941: 0.5 w
Operating Current	MS951/961: 165 mA typical @ 5 VDC MS941: 100 mA typical @ 5 VDC
Standby Current	MS951/961: 65 mA typical @ 5 VDC MS941: 30 mA typical @ 5 VDC
DC Transformers	Class 2; 5 VDC @ 300 mA
Laser Class	CDRH: Class II; EN60825-1: 1994/A11: 1996 Class I
EMC	FCC Class A, CISPR 22 Class A

ENVIRONMENTAL


Operating Temperature	0°C to 35°C (32°F to 95°F)
Storage Temperature	-40°C to 60°C (-40°F to 140°F)
Humidity	5% to 95% relative humidity, non-condensing
Light Levels	Up to 450 footcandles
Shock	Designed to withstand 1.5 m (5') drops
Contaminants	Sealed to resist airborne particulate contaminants
Ventilation	None required

*Bar code dependent.
Specifications subject to change without notice.
Printed U.S.A., September 1998




Depth of Field

MS951/941

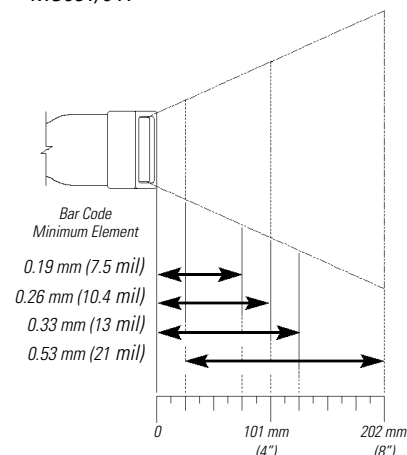

MS961

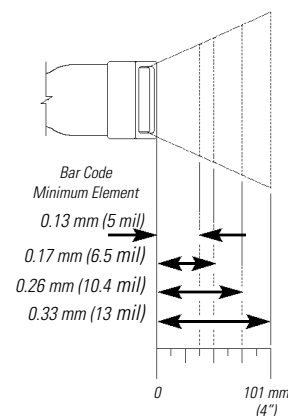

USA
Metrologic Instruments, Inc.
Tel. 1-800-ID-METRO
Fax 1-609-228-6673
info@metrologic.com

Europe
Metrologic Instruments GmbH
Tel. 49-89-89019-0
Fax 49-89-89019-200
metrologic@europe.metrologic.com

South America
Metrologic Instruments
Tel. 55-11-5505-6568
Fax 55-11-5505-1681
info@sa.metrologic.com

Brazil
Metrologic do Brasil Ltda
Tel. 55-11-5505-2396
Fax 55-11-5507-2301
metrolog@br.metrologic.com

Asia
Metrologic Asia (Pte) Ltd
Tel. 65-842-7155
Fax 65-842-7166
ant888@cyberway.com.sg

