

P330i

PERFORMANCE



The New Face of Reliability

The next generation of the world's leading card printer, Zebra's P330i is the most powerful and flexibility card printer in its class. Easy to use, this single-sided card printer produces reliable and high performance printing at an affordable price.

Use the P330i card printer to print:

- Corporate ID cards
- Student and faculty ID's and access control cards
- Membership and club cards for retail and warehouses
- Hospital staff and patient ID's


Zebra P330i Advantages

Reliable Operation: Newest generation of the highly reliable P300 series; Revolutionary angled card feeder design*

Powerful: LCD display; Translucent card feeder and print viewing; Printhead bracket opens more than twice as wide as P310; Gentle open and close printhead latch

Flexible: 16 MB memory standard
Optional Built-in Ethernet
Pass-through contact and contactless smart chip encoding options
2 Years Parts & Labour Warranty

* patent pending

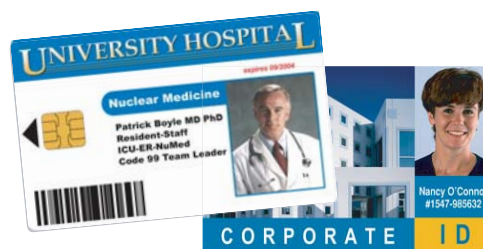

Basic Specifications:

- 25 Second/Card Full Colour Print Speed
- USB Standard
- 100 Card Capacity Feeder (220 high capacity feeder option)
- LCD for immediate printer status
- i Series Printers require the use of TrueColours™ i Series ribbons for full colour printing

P330i CARD PRINTER

P330i

Card Printer Product Specifications



General Specifications

- » High speed printing
- » 16MB image memory standard
- » Windows® drivers for 2000 and XP
- » Bi-directional driver communication
- » Two year printer warranty
- » Two year (unlimited passes) printhead warranty

Printing

- » Color dye sublimation or monochrome thermal transfer printing
- » 25 seconds per card full color single-sided (YMCKO)
- » 4 seconds/card for resin black (K)
- » 300 dpi (11.8 dots/mm) print resolution

BarCodes

- » Code 39, Code 128 B & C with & without check digit
- » 2 of 5 & 2 of 5 Interleaved
- » UPC-A, EAN 8 & EAN 13
- » PDF-417 2D bar code and other symbologies can be printed via Windows drivers

Card Specifications

- » Types: PVC, PVC Composite, Adhesive backed
- » Card width/length: ISO CR-80-ISO 7810, 2.12" (54mm) x 3.38" (86mm)
- » Magnetic Stripe-ISO 7811
- » Smart Card-ISO 7816-2
- » Card thickness: 10 mil (.25mm) to 60 mil (1.524mm) (+/- 10%)
- » Card feeder capacity: 100 cards (30 mil)
- » Card output hopper capacity: 100 cards (30 mil)

Ribbon Specifications

- » i Series Printers require the use of i Series ribbons for full color printing
- » Monochrome: 1500 (Black) & 1000 cards/roll
- » Monochrome colors: black, red, blue, green, silver, gold, white and scratch-off grey
- » YMCKO: 200 & 330 cards/roll
- » KdO: 500 cards/roll
- » KrO: 500 cards/roll
- » Overlay varnishes: Clear and Hologram: 350 cards/roll



Communications Interface

- » USB 1.1 (cable included)

Mechanical

- » Width: 18.2 in (462mm)
- » Depth: 9.4 in (239mm)
- » Height: 10.1 in (256mm)
- » Weight: 15.5 lbs (7.0kg)

Electrical

- » 110 ~ 240 Volts AC, 50 ~ 60 Hz (auto switching)
- » FCC Class B, CE, UL and CUL approved

Environmental

- » Operating Temperature: 60°F to 86°F (15°C to 30°C)
- » Operating Humidity: 20% to 65% non-condensing
- » Storage Temperature: 23°F to 158°F (-5°C to 70°C)
- » Storage Humidity: 20% to 70% non-condensing
- » Ventilation: Free air

Options

- » Built-in Ethernet
- » RS232 port
- » Smart card contact and contactless (30 mil cards only)
- » Magnetic encoder (30 mil cards only)
- » Cleaning supplies
- » High capacity feeder (220 cards)



P330i with optional 220 card input hopper

www.zebracard.com

* Optimized for use with Zebra media



PPC
Smarter Card Solutions



Practical Peripherals Corporation Pty Ltd

QUEENSLAND
Unit 4 / 106 Fison Ave
Eagle Farm Qld 4009
Tel: (07) 3868 4877
Fax: (07) 3216 4633

NEW SOUTH WALES
Level 1, 34 Punch Street
Artarmon NSW 2064
Tel: (02) 9436 4766
Fax: (02) 9436 4605

VICTORIA
26 Ormond Street
Pascoe Vale Vic 3044
Tel: (03) 9350 4077
Fax: (03) 9350 4099

<http://www.ppc.com.au>

sales@ppc.com.au