

DUAL

POS...Check it out !!!

With SENOR's Dual POS, entertain and inform your customers!!!

Today, with the interactive R&D and Marketing team, SENOR has improved the flagship model into not only the simple and effective POS machine, but also an Advertising medium.

By building on the best of the best, SENOR has added an Interactive Touch LCD display to the back of the Shop POS, enabling MP3 advertisings, promotions, and even weather forecasts to be shown to your customers.

SENOR's Shop POS took the world by storm!!! With the stylish design, small footprint, ultimate reliability, it has been the greatest shop assistant any storeowners could own!!!



DUAL POS




DUAL SCAN POS WP

DUAL POS



.....Dual Shop POS

- Intel 855GM built-in Intel extreme graphic 2
- Intel Dynamic Video Memory up to 64MB shared with system
- 2nd Screen Available size : 12.1" (Compatible with any VGA output screen size)
- The 2nd screen allows fixture away from the terminal
- Power from POS terminal
- Support USB 2.0
- Operating system: Windows 2000, XP, Linux, WEPOS

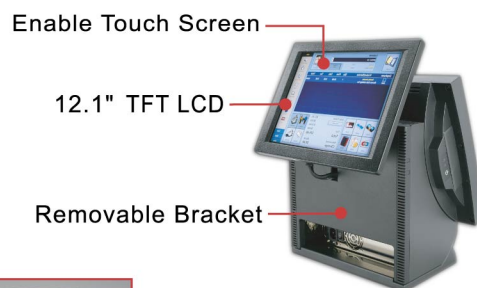

.....Dual Scan POS WP

Dual Scan POS...



SENIOR TECH PTY., LTD.

65 Weaver Street, Coopers Plains
QLD 4108, Australia

Tel: +61 7 3275 5888
Fax: +61 7 3275 5800

<http://www.senior.com.au>
e-mail: sales@senior.com.au



SENIOR TECH CO., LTD.

No.165, Kang Ning Street, Hsichih, Taipei Hsien 221, Taiwan.

Tel: +886-2-26950405 Fax: +886-2-26952745

<http://www.senortech.com> E-mail: sales@senortech.com

ROBOT/SHOP/SCAN POS 12



2010/05/05

Name	Specification	
Main Board	GST-590D	
CPU Supports	Intel D510 dual core 1.66GHz, 1MB L2 cache	
System Memory	2 x SO-DIMM Sockets, 200-pin DDRII -667/800, max. 4GB	
Capacitor	Solid type	
Display Function	CPU integrated graphic	
LCD Touch Panel		
LCD Size	12/15" TFT LCD	
Resolution	1024 x 768	
Brightness	250 cd/m ² or 350 cd/m ²	
Touch Screen	ELO or SENOR five-wire Resistive touch / Infrared touch	
Connectivity		
SATA	2 ports SATA connector (1 for Removable Hard Disk Drive)	
IDE	IDE1: 1 x Slim Type Drive+ 1 x Compact Flash socket	
LAN	1 x RJ-45 LAN port 10/100/1000 Mbps	
USB	4x External USB2.0 ports	
Parallel	1 x DB25 Connector	
External Serial	5 x RJ48 for COM(1 x RJ48 reserved for VFD, COM1) or 3 x RJ48 for COM + 2 x RJ11 for Cash Drawer(1 x RJ48 reserved for VFD, COM1)	
Internal Serial	COM1 for VFD, COM2 for Touch Panel	
PS/2 KB	1 x Mini Din Jack	
VGA	1 x DB15 Connector	
Audio	1 x Earphone Jack For Line- out	
Mechanical & Environment		
Dimension (W x D x H)	328 x 275 x 228 mm	366 x 275 x 246 mm
Weight	N.W. 7.0 Kgs	N.W. 7.1Kgs
Motorized Angel Adjustment	SENON Patent Design	
Splash Resistant	IP43	
Heat Pipe	Heat Pipe Solution for CPU Cooler	
Safety Certifications	FCC ClassB / CE / CCC / UL / CB	
Storage temperature	-20℃~60℃	
Operating temperature	0~40℃	
Relative Humidity	20%-80% (non-condensing)	
Software		
Operation System	Win 2000 / XP Pro XP Embeded/ CE(6.0) , Linux Kernel 2.4~2.6, Business VESTA, Windows 7,WEPOS , POS Ready	
Self-testing program	Observer software	
Peripheral Options		
Infrared keyboard	USB / Keyboard wedge interface	
Magnetic Card Reader	Single Track, Double Tracks, Triple Tracks	
Smart Card Reader	ISO-7816 compatible	
Finger Print Sensor	Optical Type, 512 dpi	
RFID	ISO/IEC 14443A / 13.56MHz	
I-button	Dallas Key	
Modem	56 Kbps Modem	
Customer Display	VFD 20x2 lines Display / LCD Graphic Display	
Programmable keys	40 keys, K/B interface	
Internal Barcode Scanner	Light Source: 650nm visible laser diode, Number of Scan Lines: 20	

※NOTE: The product information and specifications are subject to change without notice.



SENIOR TECH CO., LTD.

No.165, Kang Ning Street, Hsichih, Taipei Hsien 221, Taiwan.

Tel: +886-2-26950405 Fax: +886-2-26952745

<http://www.senortech.com> E-mail: sales@senortech.com



ROBOT/SHOP/SCAN POS 8

2009/07/07

Name	Specification	
Main Board	ST-588	
CPU Supports	Intel Atom™ processor N270 1.60GHz, 533MHz FSB, 512K L2 cache	
System Memory	2 x SO-DIMM Sockets, 200-pin DDRII 533, max. 2GB	
Chipset	Intel 945GSE/ICH7M	
Display Function	945GSE built-in Intel Graphics Media Accelerator (GMA) 950	
LCD Touch Panel		
LCD Size	12/15" TFT LCD	
Resolution	1024 x 768	
Brightness	250 cd/m ² or 350 cd/m ²	
Touch Screen	ELO or SENOR five-wire Resistive touch / Infrared touch	
Connectivity		
SATA	2 ports SATA connector (1 for Removable Hard Disk Drive)	
IDE	IDE1: 1 x Slim Type Drive+ 1 x Compact Flash socket	
LAN	1 x RJ-45 LAN port 10/100/1000 Mbps	
USB	6 x External USB2.0 ports	
Parallel	1 x DB25 Connector	
External Serial	5 x RJ48 for COM(1 x RJ48 reserved for VFD, COM1) or 3 x RJ48 for COM + 2 x RJ11 for Cash Drawer(1 x RJ48 reserved for VFD, COM1)	
Internal Serial	COM1 for VFD, COM2 for Touch Panel	
PS/2 KB	1 x Mini Din Jack	
VGA	1 x DB15 Connector	
Audio	1 x Earphone Jack For Line- out	
Mechanical & Environment		
Dimension (W x D x H)	328 x 275 x 228 mm	366 x 275 x 246 mm
Weight	N.W. 7.0 Kgs	N.W. 7.1Kgs
Motorized Angel Adjustment	SENIOR Patent Design	
Splash Resistant	IP43	
Heat Pipe	Heat Pipe Solution for CPU Cooler	
Safety Certifications	FCC / CE / CCC / UL / CB	
Storage temperature	-20℃~60℃	
Operating temperature	0°~40℃	
Relative Humidity	20%-80% (non-condensing)	
Software		
Operation System	Windows 2000 / XP / CE(5.0) / Business Vista	
Self-testing program	Observer software	
Peripheral Options		
Infrared keyboard	USB / Keyboard wedge interface	
Magnetic Card Reader	Single Track, Double Tracks, Triple Tracks	
Smart Card Reader	ISO-7816 compatible	
Finger Print Sensor	Optical Type, 512 dpi	
RFID	ISO/IEC 14443A / 13.56MHz	
I-button	Dallas Key	
Modem	56 Kbps Modem	
Customer Display	VFD 20x2 lines Display / LCD Graphic Display	
Programmable keys	40 keys, K/B interface	
Internal Barcode Scanner	Light Source: 650nm visible laser diode, Number of Scan Lines: 20	

※NOTE: The product information and specifications are subject to change without notice.