

# iSPOS



Robust | Power | Precision



**SEÑOR**


# The ISPOS is a Mix of Contemporary Design and Great Functionality



Stay ahead of the competition with SENOR's fan-less touch system all-in-one, ISPOS. Enclosed in a heat dissipating solid aluminum die-cast casing, the ISPOS offers innovation and precision at it's finest.

The ISPOS has undergone stringent industrial testing to ensure qualifications received for 'Ingress Protection'. Awarded IP66 certification, the ISPOS ensures total protection against dust and strong jets of liquids from all directions.

Furthermore, the 30degrees angle tilt of the card reader provides user comfort and convenience. Designed with the natural movement of the human body in mind, the ISPOS is an ergonomic Touch Screen System.

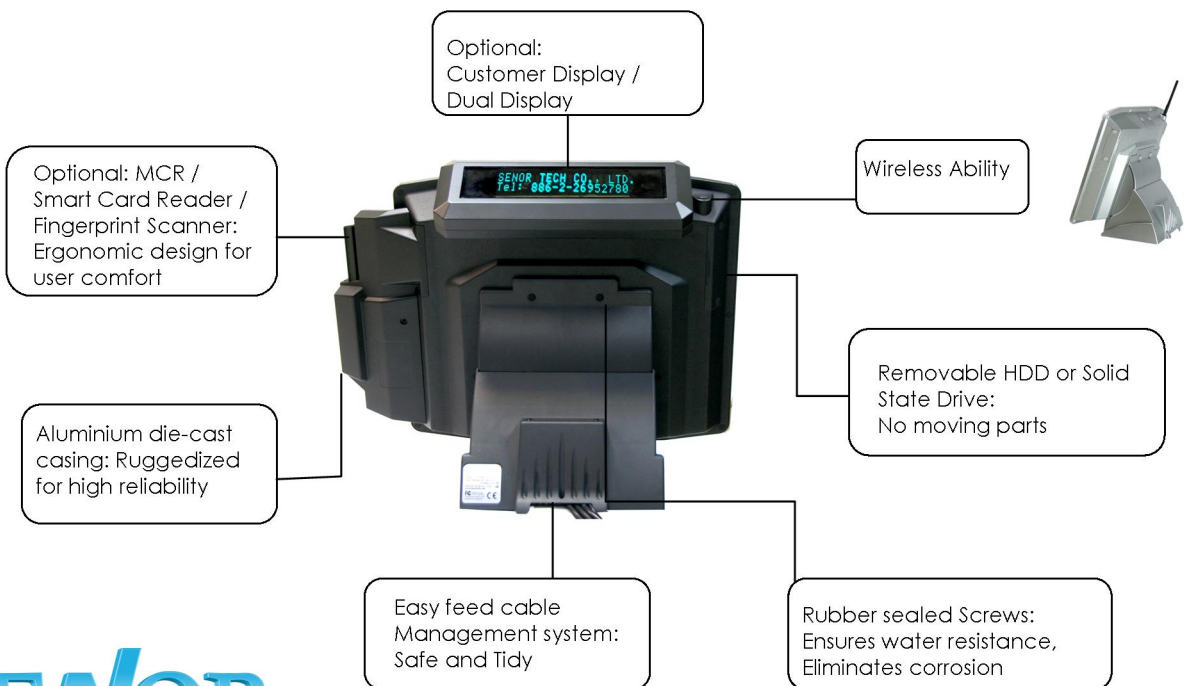





## DUAL ISPOS: Dual Results

The Dual ISPOS offers all the features of a Point of Sale terminal and much more. It engages the customer at the point of purchase through promotions, advertising and motion videos from the second display.

Dual ISPOS is not only versatile, but it also provides maximum eye-catching exposures to your customers.

The second screen can aid sales through attention grabbing interactive displays and influence the customers purchasing decision right at the point of purchase whilst at the same time offering live newsfeeds and weather forecast.

Achieve more with the DUAL ISPOS.




Various mounting ability for versatility and convenience

Providing **Superior** User Safety and Peace of Mind.

The Dual ISPOS provides enhanced security features such as concealed mounting hardware and internal cable management, along side an elegant design, giving your point-of-sale hardware a professional and state of the art finish.

### Dual Screens, Dual Functionality, Dual Benefits

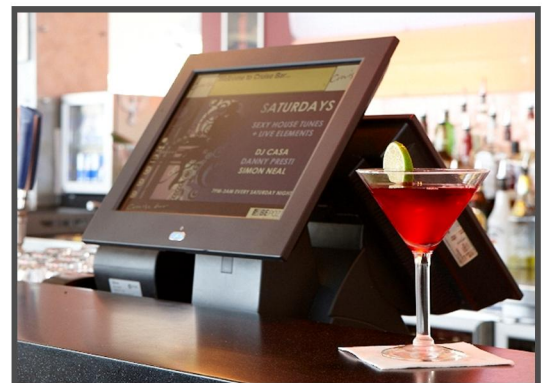



**Warehouse. Hospitality. Retail. Bakery. Resort. Marine. Industrial. Medical**  
**Quality. Safety. Versatility**

The Senor Building  
65 Weaver Street  
Coopers Plains  
QLD. Australia. 4108

P: +61 7 3275 5888

F: +61 7 3275 5800

[sales@senortech.com.au](mailto:sales@senortech.com.au)

[www.senortech.com.au](http://www.senortech.com.au)



Global Offices

Taiwan | Australia | China | Netherlands | USA

**SEVOR TECH CO., LTD.**

No.165, Kang Ning Street, Hsichih, Taipei Hsien 221, Taiwan.  
 Tel: +886-2-26950405 Fax: +886-2-26952745  
<http://www.senortech.com> E-mail: sales@senortech.com

**iSPOS 877**

2010/05/05

Name	Specification	
Main Board	GST-390D	
CPU Supports	Intel D510 dual Core 1.66GHz, w/ 1MB Cache	
System Memory	Two SODIMM DDR2 socket supports (Notebook type 200-Pin) Supports DDR2 667/800 DIMM Max.4GB	
Display Function	CPU integrated graphic	
Capacitor	Solid type	
<b>LCD Touch Panel</b>		
LCD Size	17" TFT LCD	
Resolution	1280 x 1024 pixels	
Brightness	250 cd/m <sup>2</sup> , 380 cd/m <sup>2</sup> , 500 cd/m <sup>2</sup>	
Touch Screen	ELO or SENOR five-wire Resistive Touch, SAW Touch, Capacitive Touch	
<b>Connectivity</b>		
SATA/IDE	SATA: 1 x socket for HDD / 1x Compact Flash socket	
LAN	1 x RJ-45 LAN port 10/100/1000 Mbps	Internal 802.11g Wireless LAN (Option)
USB	3x External USB ports	
External Serial	4X RJ45 for COM or 2 X RJ45 for COM + 2 X RJ11 for Cash Drawer	
Internal Serial	COM 1 for VFD, COM2 for Touch Panel	
Parallel	1 x Mini Printer Port	
VGA / Printer Port	iSPOS 877 P (mini-printer port) / iSPOS 877 V (VGA port)	
PS/2 KB	1 x Mini Din Jack	
Audio	1 X Earphone Jack For Line- out	
<b>Mechanical &amp; Environment</b>		
Dimension (W X D X H )	446x246x420mm	
Weight	9.6Kg	
Fanless & Ventless	Aluminum Casing, Fanless & Ventless System	
Infrared Function	Built-in Infrared K/B & Mouse Receiver(Option)	
Splash Resistant	IP66(IP43 with card reader)	
Safety Certifications	FCC / CE / CCC / TUV / CB	
Storage temperature	-20°C ~60°C	
Operating temperature	0°-40 °C	
Relative Humidity	10%-90% (non-condensing)	
<b>Software</b>		
Operation System	Win 2000 / XP Pro XP Embeded/ CE(6.0) , Linux Kernel 2.4~2.6, Business VESTA, Windows 7, WEPOS , POS Ready	
Self-testing program	SEVOR Diagnostic	
<b>Peripheral Options</b>		
Infrared keyboard	Keyboard wedge interface	
Magnetic Card Reader	Single Track, Double Tracks, Triple Tracks	
Contactless Card Reader	RFID (ISO/IEC 14443A / 13.56MHz)	
Smart Card Reader	ISO-7816 compatible	
Finger Print Sensor	Optical Type, 512 dpi	
I-button	Dallas Key	
Customer Display	VFD 20x2 lines Display / 7" LCD Graphic Display	

※NOTE: The product information and specifications are subject to change without notice.