


## Industrial OEM Reader Board

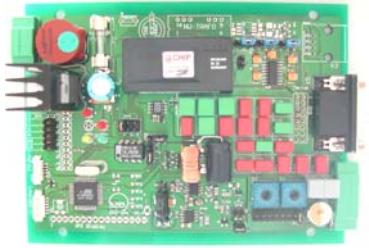

|                                  |                                    |                                      |
|----------------------------------|------------------------------------|--------------------------------------|
| <b>Description:</b>              | Industrial OEM Reader Board        |                                      |
| <b>Frequency:</b>                | 125 / 134 kHz                      |                                      |
| <b>Antenna:</b>                  | External antennas TPA-31-xx series | Optional                             |
| <b>Antenna tuning:</b>           | On board / switches                |                                      |
| <b>Read distance:</b>            | Up to 600 mm                       |                                      |
| <b>Power supply:</b>             | 12 V DC                            | Optional with power supply TAC-11-12 |
| <b>Typ. supply Current:</b>      | 250 mA                             |                                      |
| <b>Interface:</b>                | Ethernet                           |                                      |
| <b>Housing:</b>                  | OEM                                |                                      |
| <b>Dimensions:</b>               | 190 x 112 x 51 mm                  |                                      |
| <b>Temperature:</b>              | -20°C....+50°C                     |                                      |
| <b>Supported transponders:</b>   | EM410x                             |                                      |
|                                  | ISO Animal FDX-B                   |                                      |
| <b>Technical certifications:</b> | CE                                 |                                      |
| <b>Part number:</b>              | TPB-32-A1                          |                                      |