

ABOUT TIMES-7

Pushing the boundaries of RFID technology worldwide Times-7 are leaders in RFID antenna design and manufacture. Our patented award winning UHF antennas meet the needs of virtually any industry application; providing customers with fast accurate tracking of products, assets & people; empowering organisations to transform processes & reduce costs.

Our SlimLine range of antennas are unique in the RFID industry; offering high levels of performance & durability in an aesthetically superior form.

Proven in a diverse & growing range of markets, applications include: retail & customer interaction, conference & people tracking, race timing, baggage handling, and logistic & supply chain asset management.


Times-7
29 Railway Avenue
Lower Hutt 5010
New Zealand
P: +64 4 569 1500

APAC
P: +64 4 974 6566

AMERICAS
P: +1 408 769 5025

E: info@times-7.com

www.times-7.com

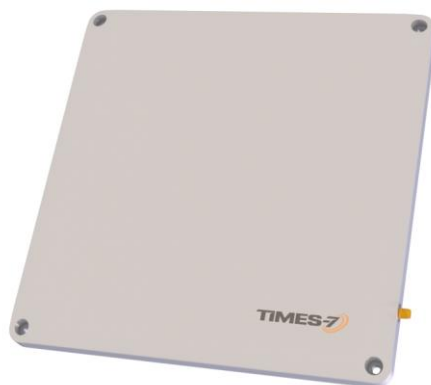

Up to 9m / 29 ft. read range

Just 14mm / 0.55 in. thick

High performance & rugged design

IP67 rating for permanent outdoor use
& industrial applications

The SlimLine A5010

The Times-7 industry leading ultra-low profile design is now available in a compact 250mm / 10 inch square footprint. IP67 rated for permanent outdoor use and built to Times-7's high standard for quality and robustness, the circularly polarised A5010 creates a new benchmark for multi-purpose UHF RFID antennas.

Specifications


Physical / Environmental Specifications

Dimensions (LxWxD):	250 mm x 250 mm x 14 mm 9.85 in. x 9.85 in. x 0.55 in.
Weight:	0.75kg / 1.6 lbs.
Radome Material:	ABS
Environmental Rating:	IP67
Operating / Storage Temperature:	-20° to +55°C / -30° to +65°C -4° to +131°F / -22° to +149°F
Mounting:	Flush Mount , rack mount accessory available
Connector type / position:	SMA female side connector

Electrical Specifications

Frequency Range:	864 – 869 MHz / 902 – 928 MHz
Polarisation:	RH Circular
Far-field Gain:	8.3 dBic
Far-field 3dB beamwidth:	68° in both planes
Typical VSWR across frequency range:	< 1.3
Front to back ratio:	19.5dB
Axial Ratio:	<1dB
Nominal Impedance:	50 Ω
Anti-static protection:	Yes
Maximum Input Power:	6 W

E-field elevation & Azimuth Patterns

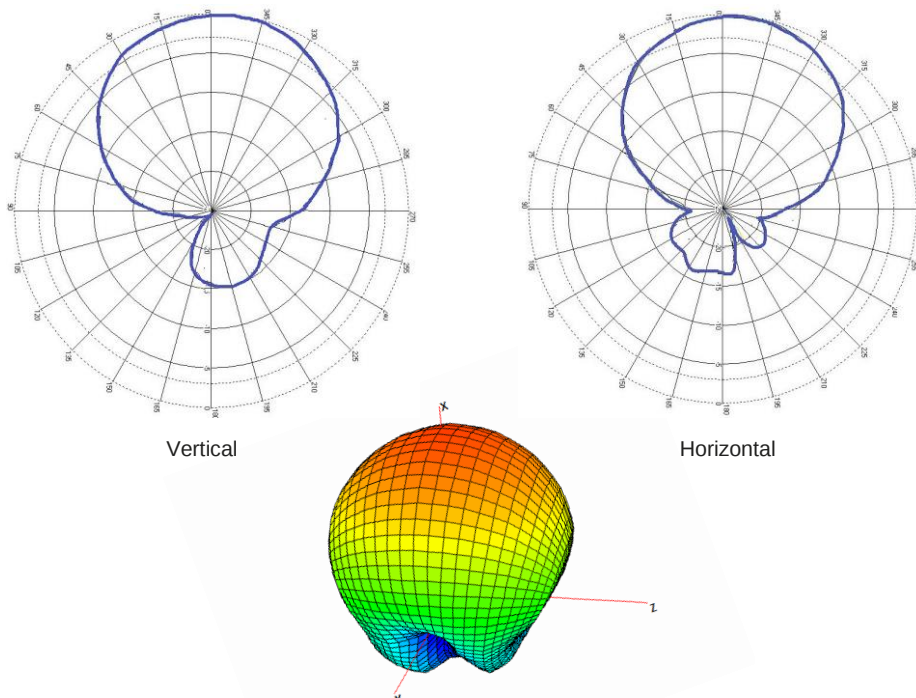


Ordering Information (please quote both product code & part no.)

Product Code	Band	Part No.
A5010	FCC 902-928 MHz	60001
A5010	ETSI 864-869 MHz	60002
Universal Mounting Plate		71757

Applications

- High performance RFID applications
- Space constrained or customer facing environments
- IP67 rugged design suitable for indoor or outdoor use



The technical data contained in this publication is not a guarantee for which Times-7 Research Ltd assumes legal accountability. It is indicative of typical performance, and if required should be relied on for specific applications only after due verification.

All technical data, specifications and other information contained herein are deemed to be the proprietary intellectual property of Times-7 Research Ltd. No reproduction, copy or use thereof may be made without the express written consent of Times-7 Research Ltd.

OUR GLOBAL NETWORK

Constantly increasing market reach and influence in the global RFID industry, Times-7's international support spans The Americas, Europe, and Asia Pacific regions through our distributor, authorized reseller and integrated solutions provider network.

Times-7 HQ
29 Railway Avenue
Lower Hutt 5010
New Zealand
P: +64 4 569 1500

APAC
P: +64 4 974 6566

Times-7 USA
21060 Homestead Road
Suite 226
Cupertino, Ca
95014

AMERICAS
P: +1 408 769 5025

E: info@times-7.com

www.times-7.com