


**SECEVENT
RFID WRISTBAND
13,56 MHz
ISO-IEC15693
ISO-IEC18000-3**

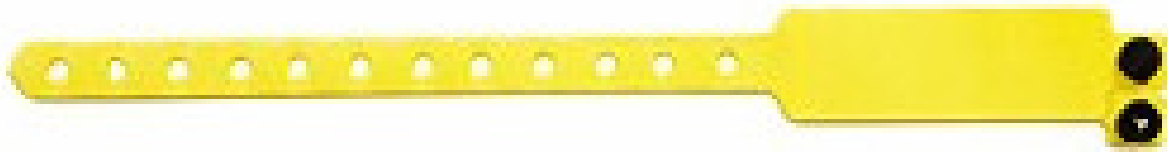

Description:	SECEVENT WRISTBAND ISO-IEC 15693		
IC type:	I-Code SLI SL2 (NXP former Philips) Total 1024 bits (64 bits R/O UID, 896 bits R/W in 28 x 4 blocks) ISO 15693, ISO18000		
IC on request:	(R/W 13.56 MHz: Mifare Series)		
Physical:	Dimensions TAG:	40 mm x 15 mm (can vary)	
	Thickness:	0,6 mm	± 0,2 mm
	Band :	12 x 250 x 25 mm ± 1 mm	Holes: 12 x Ø 3 mm
	Weight:	3,5 g	± 0,5 mm
	Material:	PVC (Paper on request)	YELLOW (GREEN, BLUE, ORANGE other colours on request)
	Assembly:	Moulded Foil	
Electrical:	Operating Frequency:	13,56 MHz	(At room temperature 20 °C)
Thermal:	Operating Temperature:	-20 °C to +60 °C	
	Storage Temperature:	-20 °C to +60 °C	
Protection Class:	Waterproof IP67		
Reading Range:	Depending on the reader design and local installation conditions. With TLB-57 OEM board up to 50 mm.		
Specials:	Printing of UID code, serial number, customised logos are available upon request.		
Part number:	I-Code SLISL2: TDD-15-AA	Mifare 1K S50: TDD-06-AA	